

DB101 THRU DB107

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings and Electrical characteristics	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Tube packing.....	4
Suggested thermal profiles for soldering processes.....	5
High reliability test capabilities.....	6

DB101 THRU DB107

1.0A Glass Passivated Single-Phase Bridge Rectifiers-50-1000V


Features

- Surge overload ratings to 30 amperes peak
- Recommended for non-automatic applications
- Ideal for & save space on printed circuit board
- Applicable for automatic insertion
- Reliable low cost construction utilizing molded plastic technology results in inexpensive product
- Glass passivated chip junctions
- Lead-free parts meet RoHS requirements
- UL recognized file # E321971
- Suffix "-H" indicates Halogen free parts, ex. DB101-H

Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, DB
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : marked on body
- Mounting Position : Any
- Weight : Approximated 0.38gram

Package outline

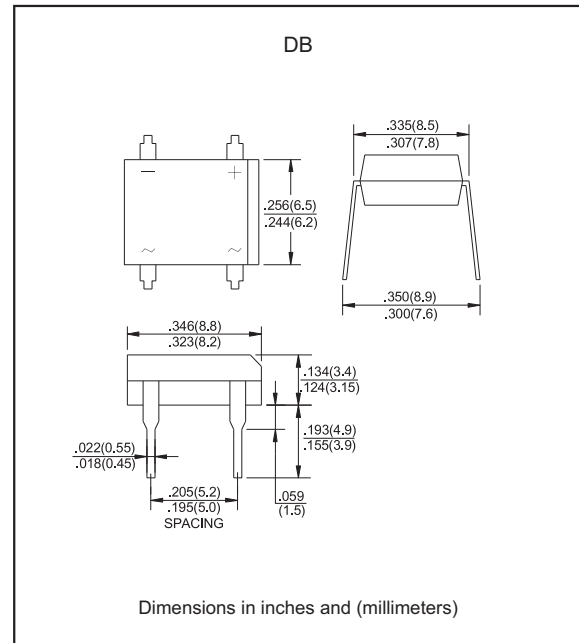

Maximum ratings and Electrical characteristics (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I_O			1.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I_{FSM}			30	A
Reverse current	$V_R = V_{RRM} \quad T_J = 25^{\circ}\text{C}$	I_R			10	uA
	$V_R = V_{RRM} \quad T_J = 125^{\circ}\text{C}$				500	
I^2t Rating for fusing	$t < 8.3\text{ms}$	I^2t			3.74	A^2s
Typical Junction Capacitance Per Element	Measured at 1.0MHz and applied reverse voltage of 4.0V DC.	C_J		25		pF
Typical thermal resistance	Junction to ambient mounted on P.C.B with 0.5*0.5"(13*13mm) copper pads.	$R_{\theta JA}$		40		$^{\circ}\text{C/W}$
Storage temperature		T_{STG}	-65		+175	$^{\circ}\text{C}$

SYMBOLS	V_{RRM}^{*1} (V)	V_{RMS}^{*2} (V)	V_R^{*3} (V)	V_F^{*4} (V)	Operating temperature $T_J, (^{\circ}\text{C})$
DB101	50	35	50	1.10	-55 to +150
DB102	100	70	100		
DB103	200	140	200		
DB104	400	280	400		
DB105	600	420	600		
DB106	800	560	800		
DB107	1000	700	1000		

*1 Repetitive peak reverse voltage

*2 RMS voltage

*3 Continuous reverse voltage

*4 Maximum forward voltage@ $I_F=1.0\text{A}$

Rating and characteristic curves (DB101 THRU DB107)

FIG.1-FORWARD CURRENT DERATING CURVE

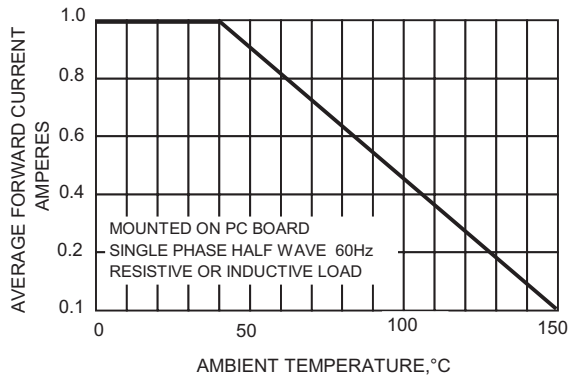


FIG.2-MXIMUM NON-REPETITIVE SURGE CURRENT

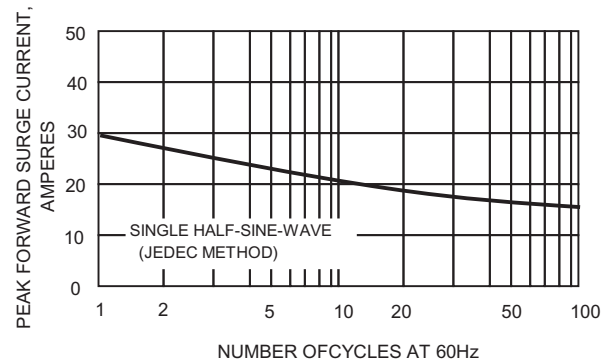


FIG.3-TYPICAL JUNCTION CAPACITANCE

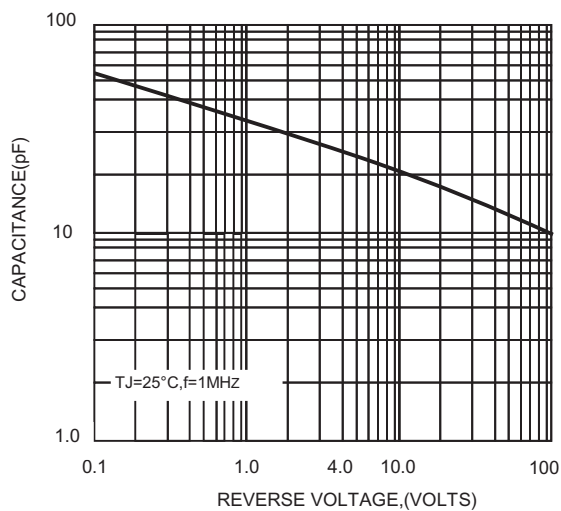


FIG.4-TYPICAL FORWARD CHARACTERISTICS




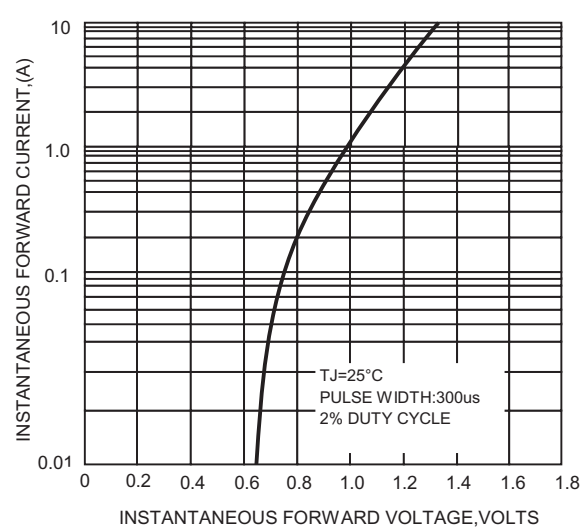


FIG.5-TYPICAL REVERSE CHARACTERISTICS

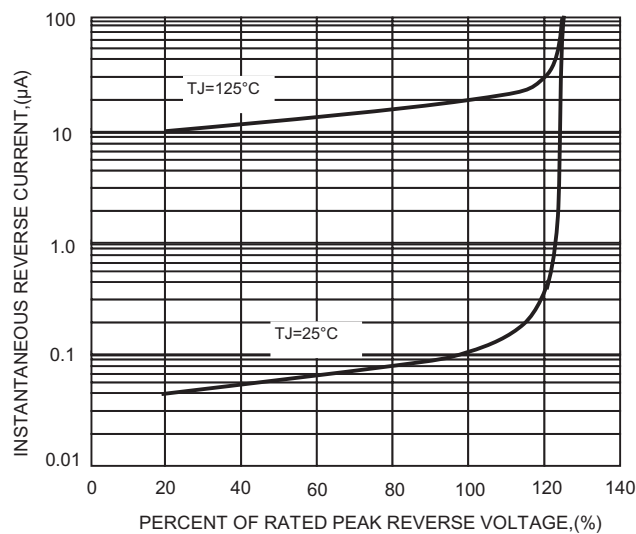

DB101 THRU DB107

Pinning information


Simplified outline	Symbol
	

Marking

Type number	Marking code
DB101	DB101
DB102	DB102
DB103	DB103
DB104	DB104
DB105	DB105
DB106	DB106
DB107	DB107

Tube packing

PACKAGE	TUBE (pcs)	TUBE SIZE (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
DB	50	440*13.4*11.4	452*164*130	5,000	3.5

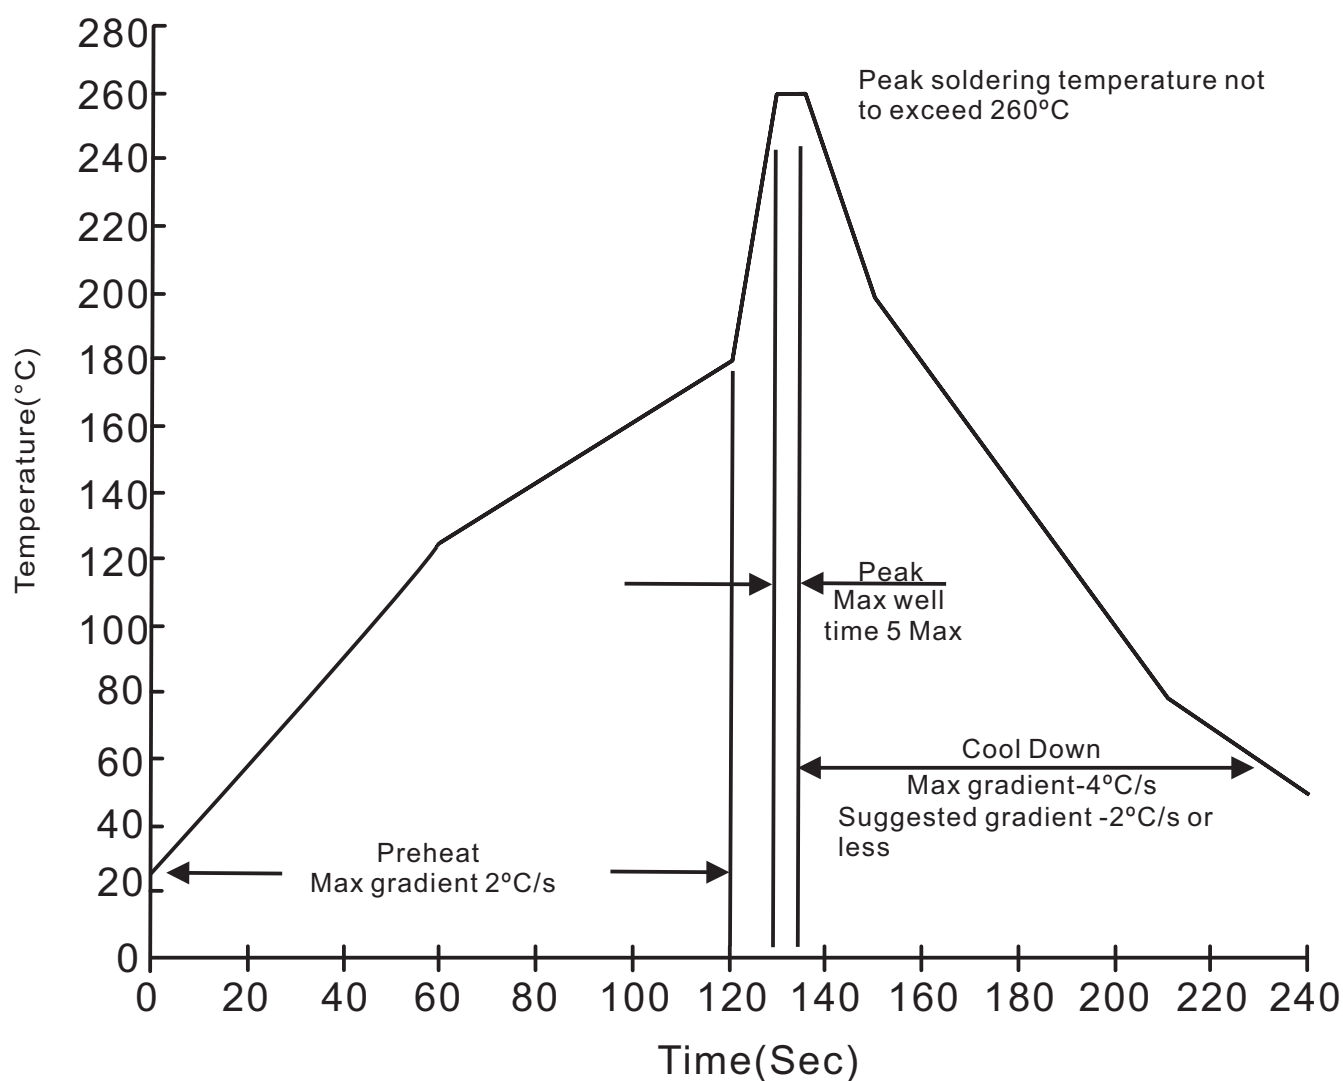DB101 THRU DB107**Suggested thermal profiles for soldering processes****1. Lead free temperature profile wave-soldering**

DB101 THRU DB107

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260 \pm 5^{\circ}\text{C}$ for $10 \pm 2\text{sec.}$	MIL-STD-750D METHOD-2031
2. Solderability	at $245 \pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R = 80\%$ rate at $T_J = 150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A = 25^{\circ}\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^{\circ}\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIG}$ at $T_A = 121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	8.3ms single half sine-wave , one surge.	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A = 85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031