

FMBTRC121SS

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings	2
Electrical characteristics.....	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Suggested solder pad layout.....	4
Suggested thermal profiles for soldering processes.....	5

FMBTRC121SS

NPN Silicon Epitaxial Planar Digital Transistor


Features

- For Switching and interface circuit and drive circuit applications.
- With built-in bias resistors.
- Simplify circuit design.
- Reduce a quantity of parts and manufacturing process.
- We declare that the material of product compliance with RoHS requirements.
- Suffix "-H" indicates Halogen free parts, ex. FMBTRC121SS-H.

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-23
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any

Package outline

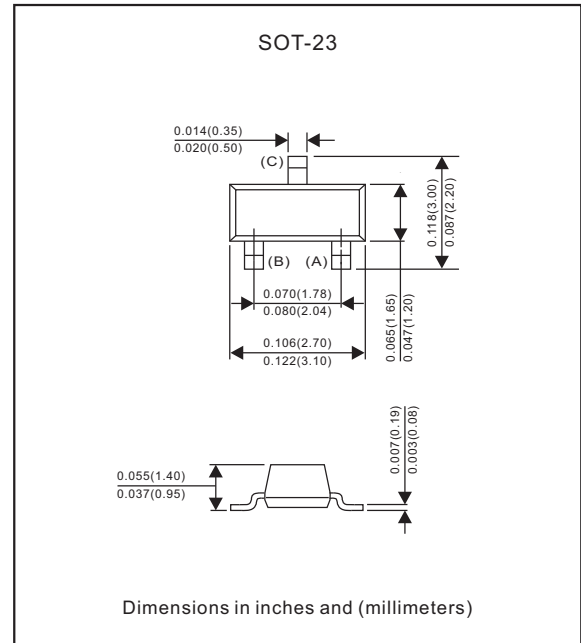

Maximum ratings (At $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Output voltage	V_O	50	V
Input voltage	V_I	40 to -15	V
Output current	I_O	100	mA
Total power dissipation	P_{tot}	200	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature range	T_{stg}	-55 to +150	$^\circ\text{C}$



Electrical characteristics (At $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min.	Typ.	Max.	Unit
DC current gain	$V_O=5\text{V}$, $I_O=5\text{mA}$	h_{FE}	33			
Output cutoff current	$V_O=50\text{V}$	$I_{O(OFF)}$			500	nA
Input current	$V_I=5\text{V}$	I_I			0.16	mA
Output voltage	$I_O=10\text{mA}$, $I_I=0.5\text{mA}$	$V_{O(ON)}$			0.3	V
Input on voltage (ON)	$V_O=0.3\text{V}$, $I_O=2\text{mA}$	$V_{I(ON)}$			5.0	V
Input off voltage (OFF)	$V_O=5\text{V}$, $I_O=100\mu\text{A}$	$V_{I(OFF)}$	1.0			V
Transition frequency	$V_O=10\text{V}$, $I_O=5\text{mA}$	$f_T^{(1)}$		250		MHz
Input resistance		R_1		47		K Ω
Base Emitter resistance		R_2		10		K Ω



(1)Characteristic of transistor only.

FMBTRC121SS

Pinning information


Pin	Simplified outline	Symbol
Pin1 Base Pin2 Emitter Pin3 Collector		

Marking

Type numbe	Marking code
FMBTRC121SS	 or 

Suggested solder pad layout


SOT-23

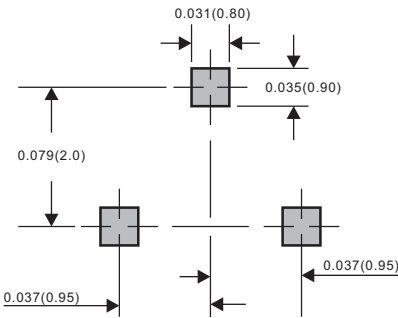

Dimensions in inches and (millimeters)

FMBTRC121SS

Packing information

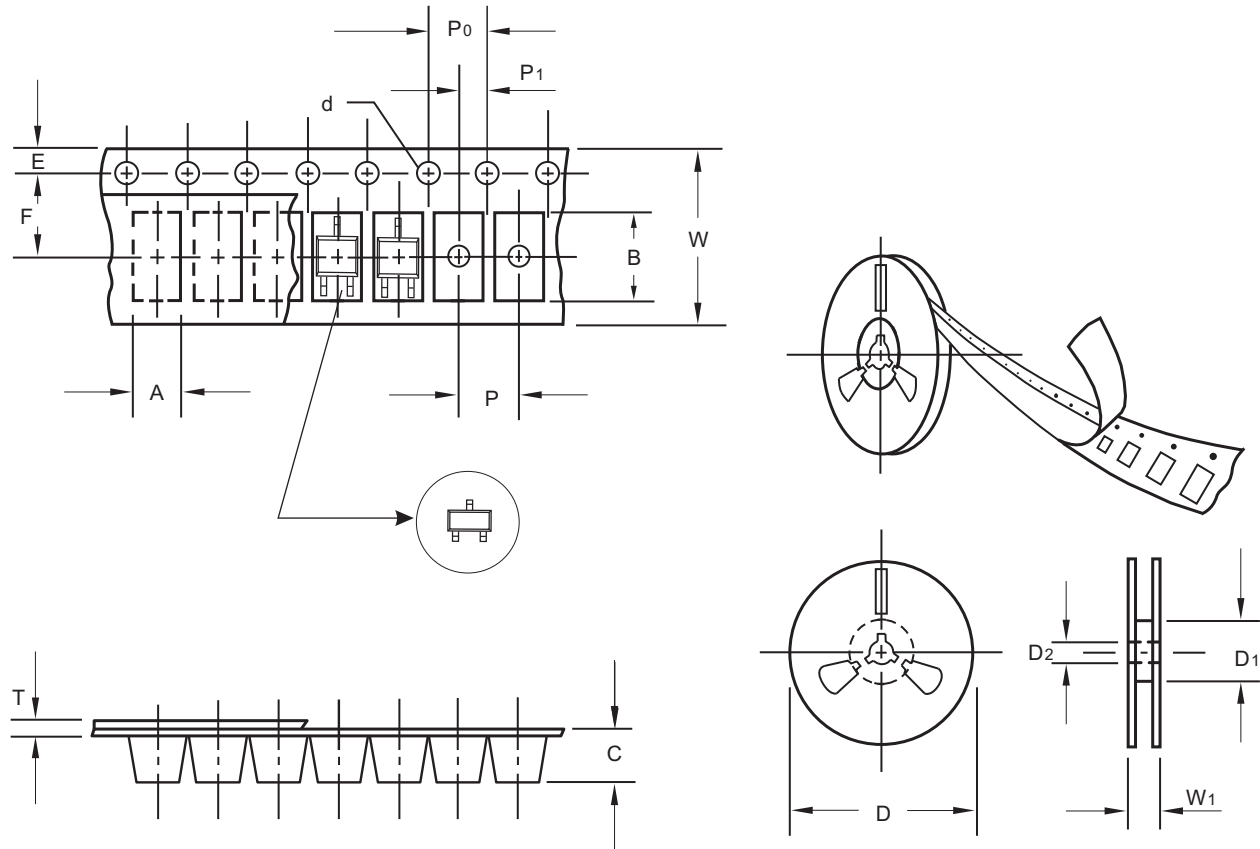

unit:mm

Item	Symbol	Tolerance	SOT-23
Carrier width	A	0.1	3.15
Carrier length	B	0.1	2.77
Carrier depth	C	0.1	1.22
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	55.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	12.0

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


FMBTRC121SS

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOT-23	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	11.6

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

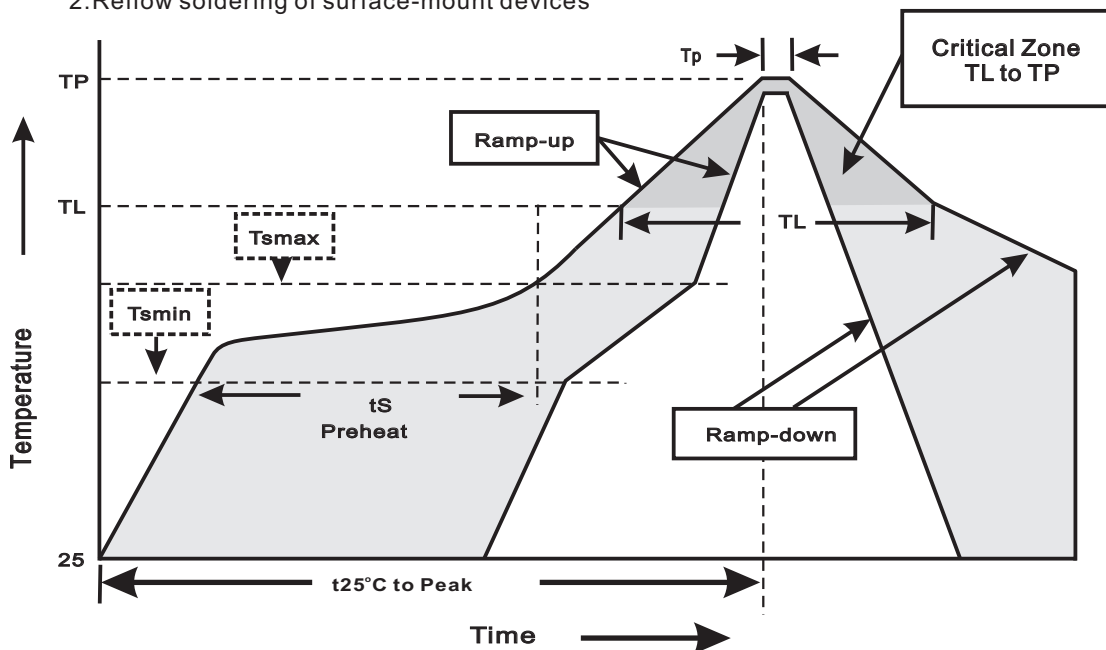

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T _L to T _P)	<3°C/sec
Preheat -Temperature Min(T _{smín}) -Temperature Max(T _{smáx}) -Time(min to max)(t _s)	150°C 200°C 60~120sec
T _{smáx} to T _L -Ramp-upRate	<3°C/sec
Time maintained above: -Temperature(T _L) -Time(t _L)	217°C 60~260sec
Peak Temperature(T _P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t _p)	10~30sec
Ramp-down Rate	<6°C/sec
Time 25°C to Peak Temperature	<6minutes