

ESDH3Z36C-Q1

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings	2
Electrical characteristics.....	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Suggested solder pad layout.....	4
Packing information.....	5
Reel packing.....	6
Suggested thermal profiles for soldering processes.....	6
High reliability test capabilities.....	7

ESDH3Z36C-Q1

SMD Bi-Directional TVS For ESD Protection : 36.0V

Features

- 420 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$).
- Protects one I/O or power line.
- AEC-Q101 Qualified.
- Provide transient protection :
IEC 61000-4-2 (ESD) $\pm 30kV$ (Air), $\pm 30kV$ (Contact).
IEC 61000-4-4 (EFT) 40A (5/50ns).
IEC 61000-4-5 (Lightning) 7.5A (8/20us).
- Lead-free parts meet environmental standards of MIL-STD-19500 /228
- Suffix "-H" indicates Halogen-free part, ex.ESDH3Z36C-Q1-H.


Applications

- Laptop computers.
- Cellular phones.
- Digital cameras.
- Personal digital assistants (PDAs).

Mechanical data

- Epoxy:UL94-V0 rated flame retardant.
- Case : Molded plastic, SOD-323F.
- Terminals : Solder plated, solder able per MIL-STD-750, Method 2026.
- Mounting Position : Any.
- Weight : Approximated 0.005 gram.

Package outline

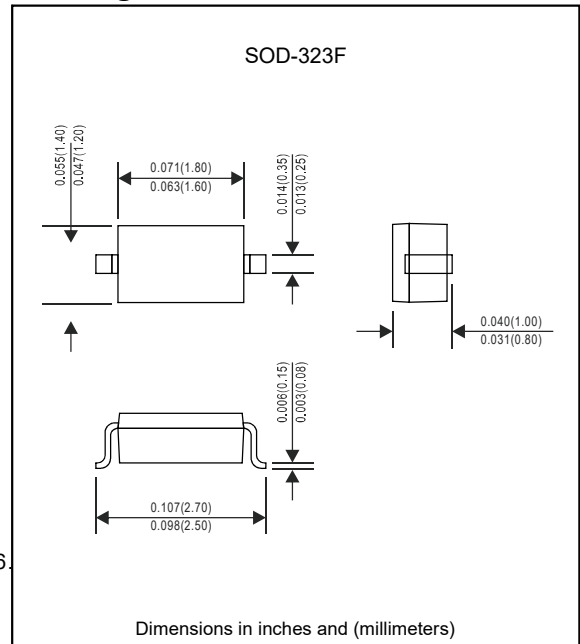

Maximum ratings (At $T_A = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power ($t_p=8/20\mu s$)	P_{PP}	420	W
Peak pulse current ($t_p=8/20\mu s$)	I_{PP}	7.5	A
ESD Per IEC 61000-4-2 (Air)	V_{ESD}	± 30	KV
ESD Per IEC 61000-4-2 (Contact)		± 30	
Operating temperature	T_{OPT}	$-55 \sim +125$	$^\circ C$
Storage temperature	T_{STG}	-55 to $+150$	$^\circ C$

Electrical characteristics (At $T_A = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				36	V
Reverse breakdown voltage	V_{BR}	$I_T = 1mA$	38			V
Reverse leakage current	I_R	$V_{RWM} = 36V$			200	nA
Clamping voltage	V_C	$I_{PP} = 7.5A, (t_p = 8 / 20\mu s)$		53	56	V
Dynamic resistance	R_{DYN}	$T_{LP} = 0.2 / 100ns$		0.1		Ω
ESD Clamping voltage	V_C	$I_{PP} = 4A, t_p = 0.2 / 100ns (T_{LP})$		44		V
ESD Clamping voltage	V_C	$I_{PP} = 16A, t_p = 0.2 / 100ns (T_{LP})$		45		V
Junction capacitance	C_J	$V_R = 0V, f = 1MHz$		20	35	pF

Note : 1. TLP setting : $t_p=100ns, t_r=0.2ns, I_{TLP}$ and V_{TLP} sample window= $t_1=70ns, t_2=90ns$.

2.Dynamic resistance calculated from $I_{PP}=4A$ to $I_{PP}=16A$ using "Best Fit".

ESDH3Z36C-Q1

Rating and characteristic curves

Figure 1: Peak Pulse Power vs. Pulse Time

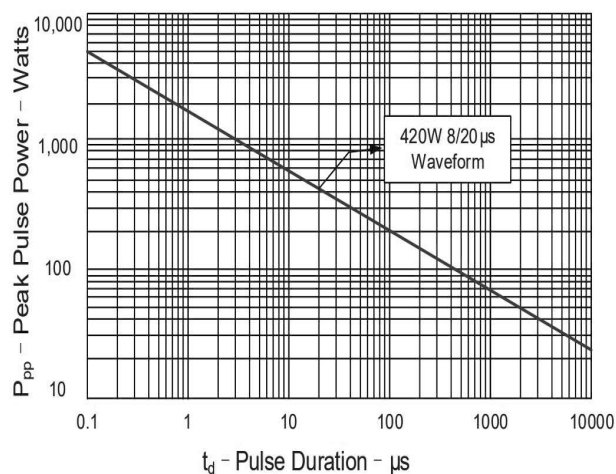


Figure 2: Power Derating Curve

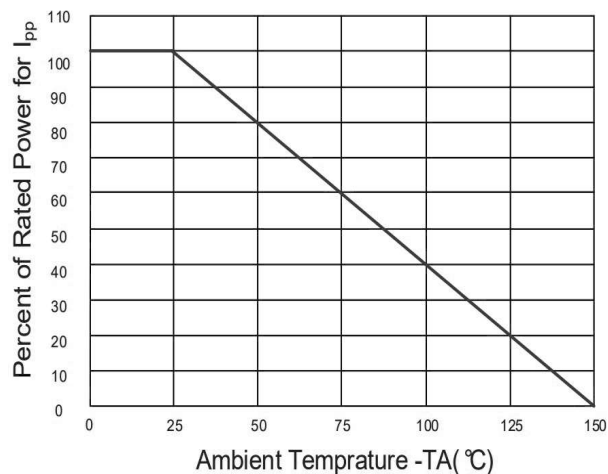


Figure 3: Clamping Voltage vs. Peak Pulse Current

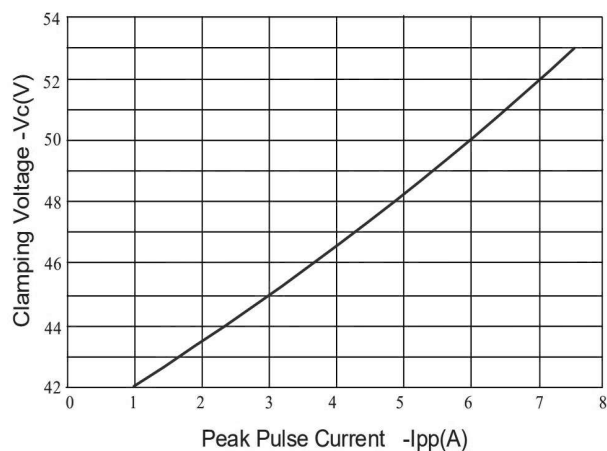


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

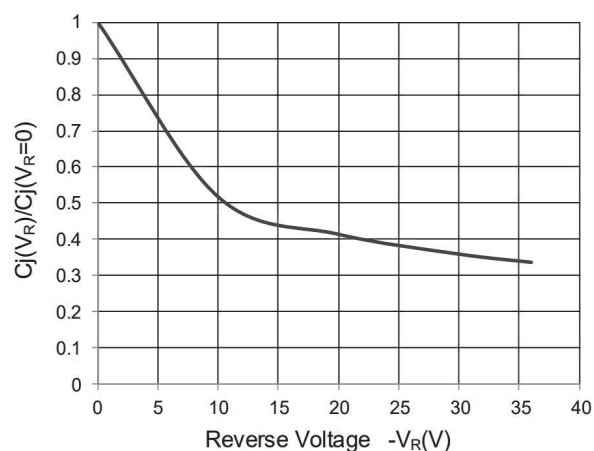


Figure 5: TLP Positive I-V Curve


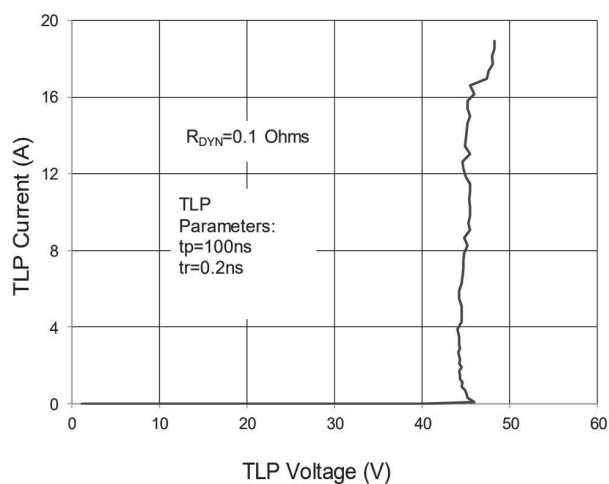


Figure 6: TLP Negative I-V Curve

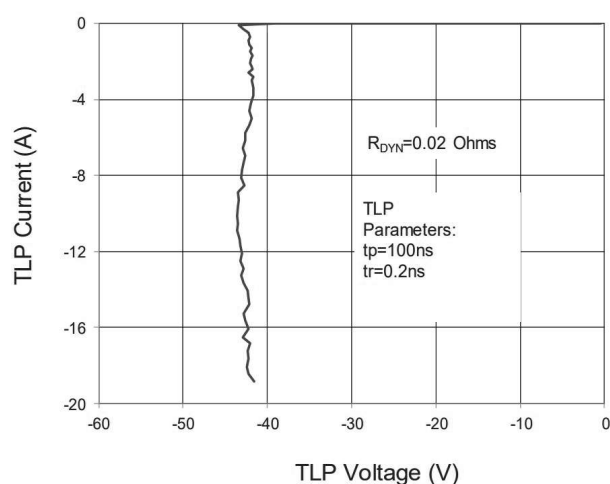

ESDH3Z36C-Q1


Pinning information

Pin	Simplified outline	Symbol
Bi-Directional		

Marking



Suggested solder pad layout

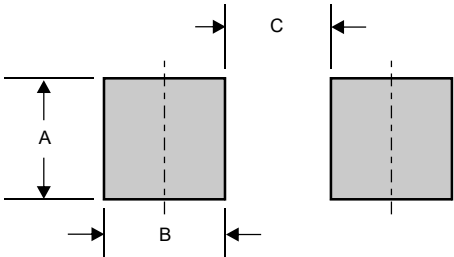


Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-323F	0.033 (0.83)	0.025 (0.63)	0.063 (1.60)

ESDH3Z36C-Q1

Packing information

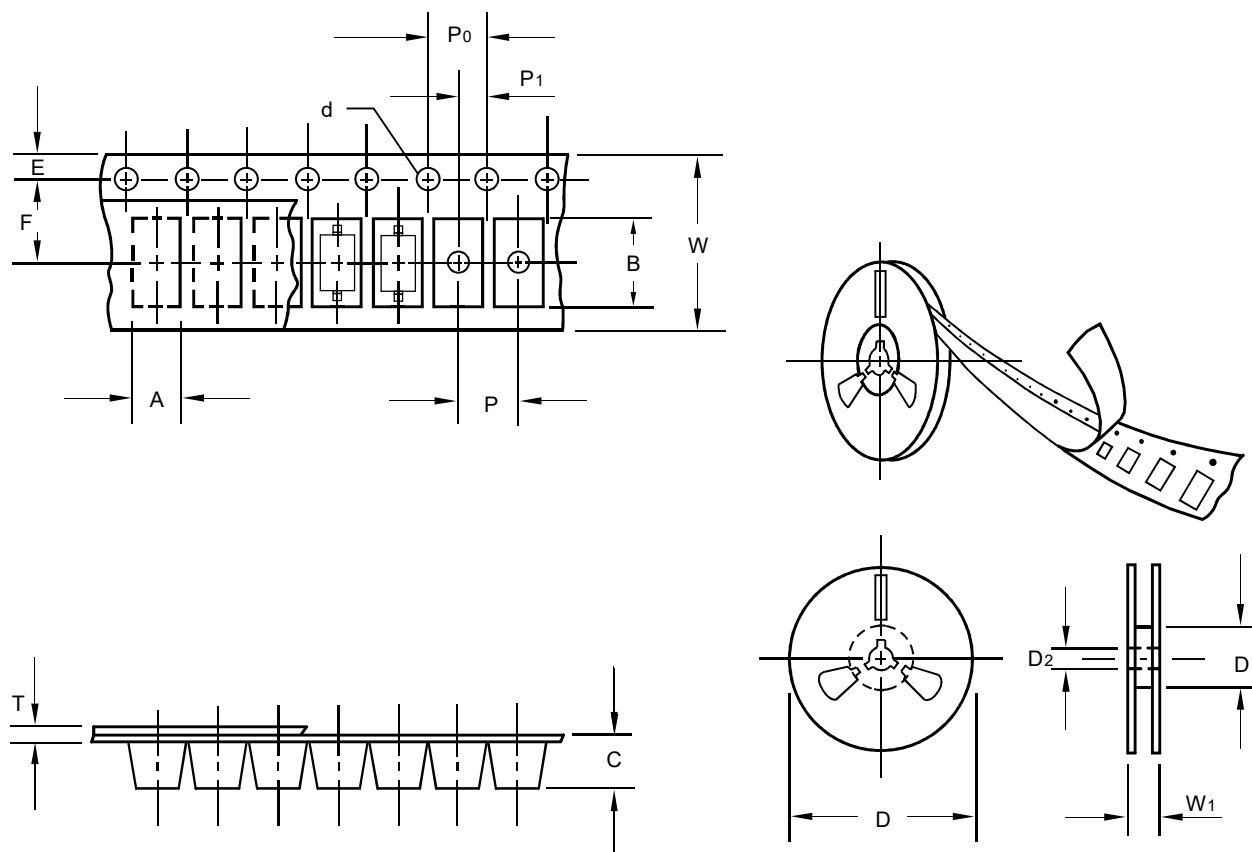

unit:mm

Item	Symbol	Tolerance	SOD-323F
Carrier width	A	0.1	1.46
Carrier length	B	0.1	2.90
Carrier depth	C	0.1	1.25
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D ₁	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D ₁	min	55.00
Feed hole diameter	D ₂	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P ₀	0.1	4.00
Embossment center	P ₁	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W ₁	1.0	9.50

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


ESDH3Z36C-Q1

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-323F	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	8.0

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

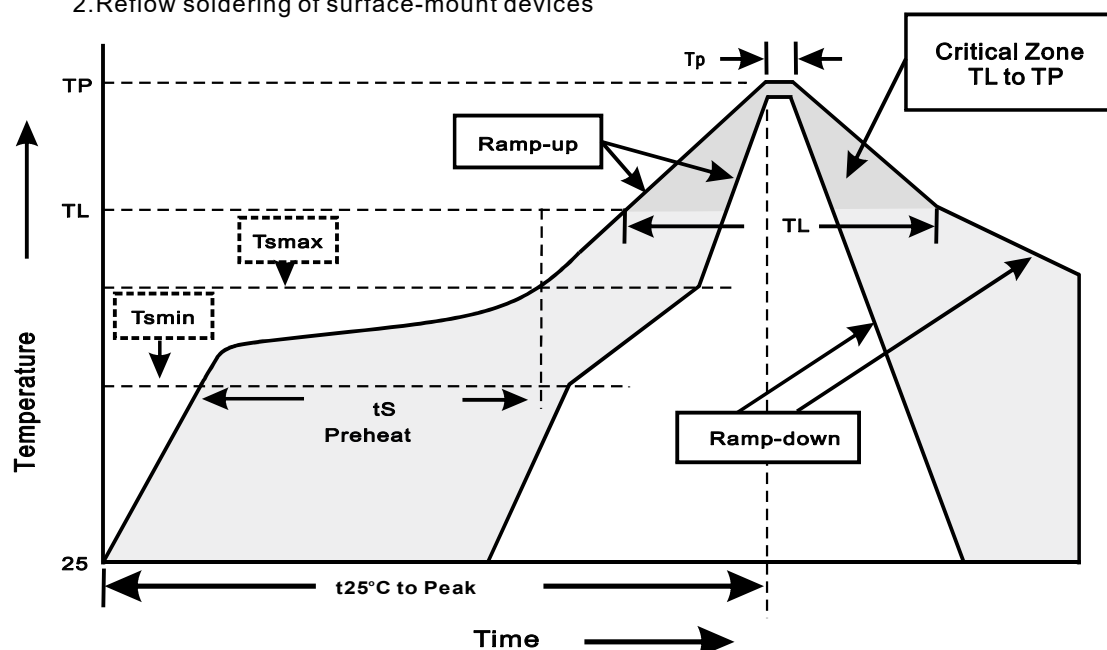

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T_L to T_P)	<3°C/sec
Preheat -Temperature Min(T_{smin}) -Temperature Max(T_{smax}) -Time(min to max)(t_s)	150°C 200°C 60~120sec
T_{smax} to T_L -Ramp-upRate	<3°C/sec
Time maintained above: -Temperature(T_L) -Time(t_L)	217°C 60~260sec
Peak Temperature(T_P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t_P)	10~30sec
Ramp-down Rate	<6°C/sec
Time 25°C to Peak Temperature	<6minutes

ESDH3Z36C-Q1

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260 \pm 5^{\circ}\text{C}$ for $10 \pm 2\text{sec.}$	MIL-STD-750D METHOD-2031
2. Solderability	at $245 \pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_{\text{BR}} = V_{\text{BR Min}} * 80\%$ at $T_J = 125^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Pressure Cooker	$15P_{\text{SIG}}$ at $T_A = 121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
5. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
6. Humidity	at $T_A = 85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
7. High Temperature Storage Life	at 150°C for 1000 hrs.	MIL-STD-750D METHOD-1031