

LL05UT0603A

List

List.....	1
Features.....	2
Package outline.....	2
Applications.....	2
Mechanical data.....	2
Maximum ratings.....	2
Electrical characteristics.....	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Suggested solder pad layout.....	4
Packing information.....	5
Reel packing.....	6
Suggested thermal profiles for soldering processes.....	6

LL05UT0603A

Ultra Low Capacitance Uni-Directional TVS For ESD Protection Array : 5.5V

Features

- Low clamping voltage.
- Low leakage current.
- Complies with following standards:
IEC 61000-4-2(ESD) ± 20 kV(Air), ± 20 kV(Contact).
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen-free parts, ex.LL05UT0603A-H.


Applications

- Cellular handsets and accessories.
- Personal digital assistants (PDS's) and portable instrumentation.
- Notebooks, handhelds, digital cameras, and audio players.
- Peripherals and industrial equipment.

Mechanical data

- Epoxy: UL94-V0 rated Flame retardant.
- Case: Molded plastic, DFN0603 (T0603).
- Moisture Sensitivity: Level 3, per J-STD-020.
- Terminals: Solder plated, solder able per J-STD-020.

Package outline

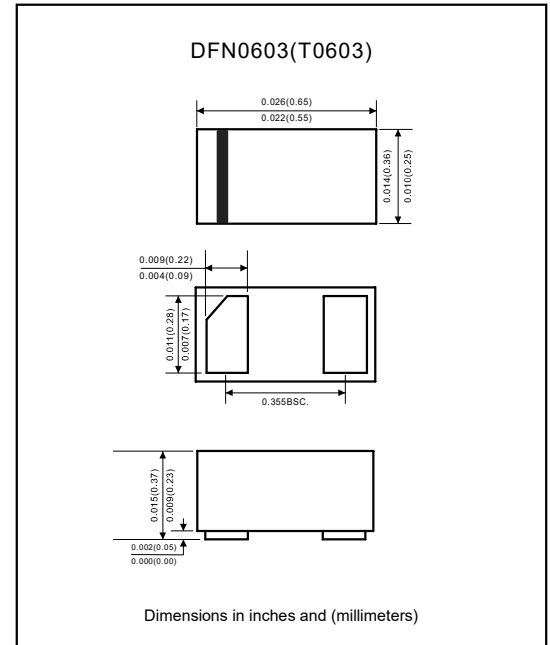

Maximum ratings (At $T_A=25^\circ\text{C}$ unless otherwise noted)





Parameter	Symbol	Ratings	Units
Peak pulse power (8/20 μs)	P_{PK}	45	W
Peak pulse current (8/20 μs)	I_{PP}	3	A
ESD per IEC61000-4-2 (Air)	V_{ESD}	± 20	KV
ESD per IEC61000-4-2 (Contact)		± 20	
Operating temperature	T_J	+125	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (At $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Units
Reverse working voltage		V_{RWM}			5.5	V
Reverse leakage current	$V_{RWM}=5.5\text{V}$	I_R		10	100	nA
Reverse breakdown voltage	$I_R=1\text{mA}$	V_{BR}	6		9	V
Clamping voltage	$I_{PP}=1\text{A}$, $t_p=8/20\mu\text{s}$	V_C		10	13	V
Clamping voltage	$I_{PP}=3\text{A}$, $t_p=8/20\mu\text{s}$			12	15	
Junction capacitance	$V_R=0\text{V}$, $f=1\text{MHz}$	C_J		0.4	0.6	pF


LL05UT0603A

Rating and characteristic curves

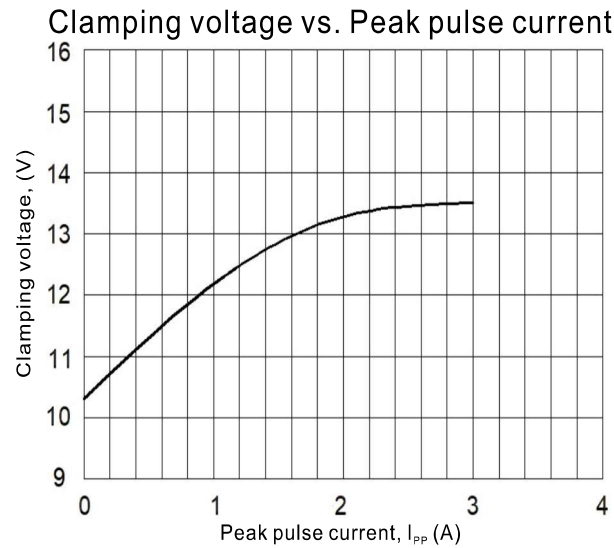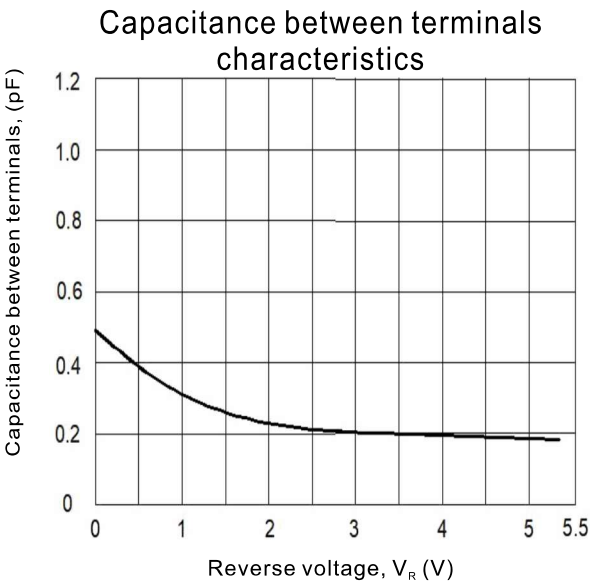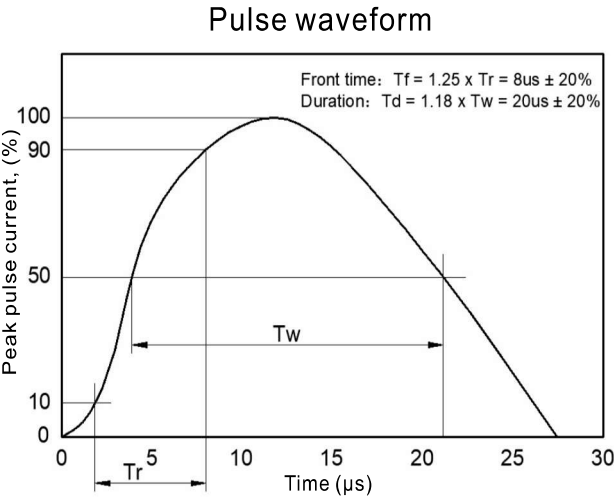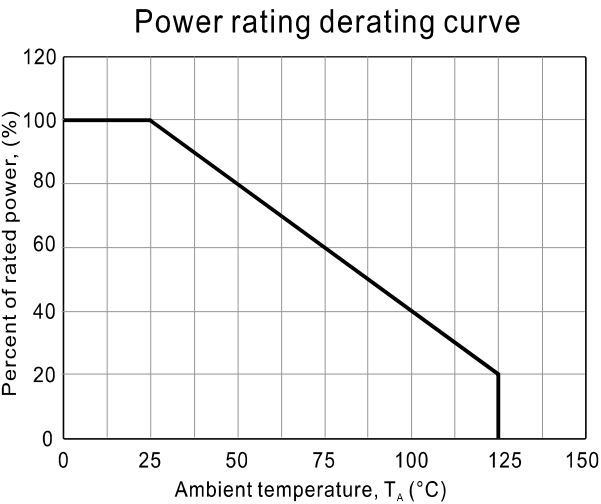

LL05UT0603A


Pinning information

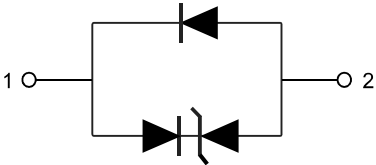Pin	Simplified outline	Symbols
Pin1 Cathode Pin2 Anode	 Top view  Bottom view	

Marking

Type number	Marking code
LL05UT0603A	5U


Suggested solder pad layout

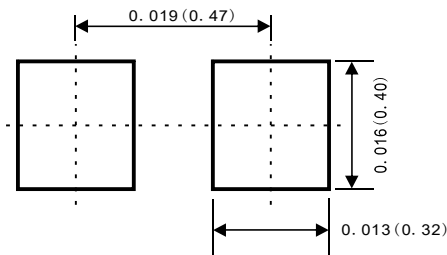

Dimensions in inches and (millimeters)

LL05UT0603A

Packing information

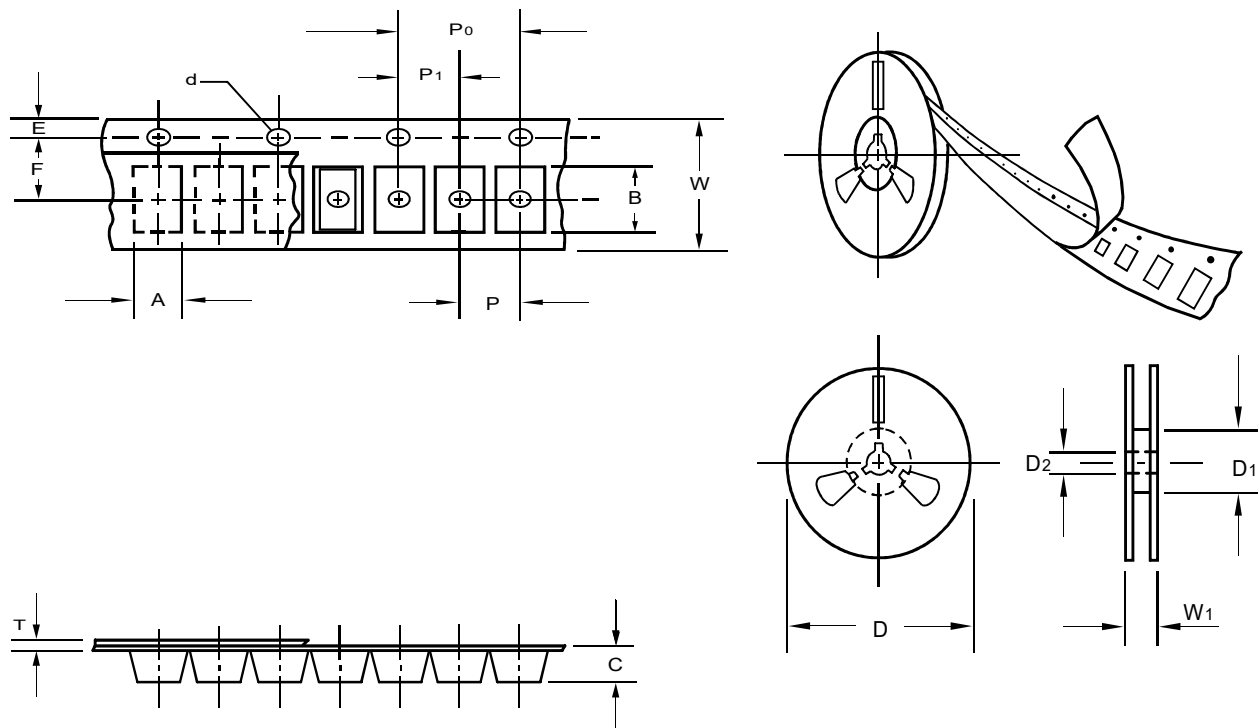

unit:mm

Item	Symbol	Tolerance	DFN0603 (T0603)
Carrier width	A	0.1	0.41
Carrier length	B	0.1	0.71
Carrier depth	C	0.1	0.38
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.0
7" Reel inner diameter	D1	min	53.40
Feed hole diameter	D2	1.0	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.5
Punch hole pitch	P	0.1	2.0
Sprocket hole pitch	P0	0.1	4.0
Embossment center	P1	0.1	2.0
Overall tape thickness	T	0.1	0.2
Tape width	W	0.3	8.0
Reel width	W1	1.0	12.3

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


LL05UT0603A

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)
DFN0603 (T0603)	7"	15,000	4.0	150,000	183*123*183	178	382*257*387

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

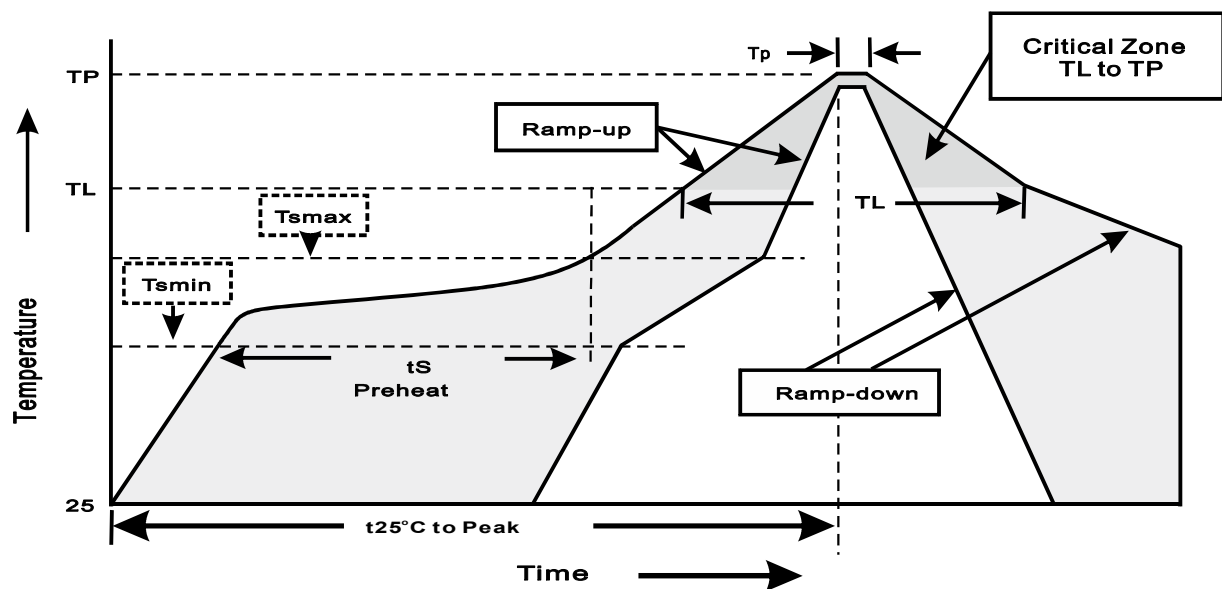

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T_L to T_P)	$<3^{\circ}\text{C/sec}$
Preheat -Temperature Min(T_{smin}) -Temperature Max(T_{smax}) -Time(min to max)(t_s)	150°C 200°C 60~120sec
T_{smax} to T_L -Ramp-upRate	$<3^{\circ}\text{C/sec}$
Time maintained above: -Temperature(T_L) -Time(t_L)	217°C 60~260sec
Peak Temperature(T_P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t_P)	10~30sec
Ramp-down Rate	$<6^{\circ}\text{C/sec}$
Time 25°C to Peak Temperature	$<6\text{minutes}$