

FMOSAB14N15

List

List.....	1
Package outline.....	2
Features.....	2
Application.....	2
Mechanical data.....	2
Maximum ratings	2
Electrical characteristics.....	3
Rating and characteristic curves.....	4~6
Pinning information.....	6
Marking.....	6
Suggested solder pad layout.....	6
Packing information.....	7
Reel packing.....	8
Suggested thermal profiles for soldering processes.....	8

FMOSAB14N15

14A 150V N-Channel Power MOSFET

Features

- $V_{DS}=150V$, $I_D=14A$.
- $R_{DS(ON)} \leq 65m\Omega$ @ $V_{GS}=10V$, $I_D=7A$.
- Ultra-low $R_{DS(ON)}$.
- Low gate charge.
- 100% UIS and R_g tested.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" dinicates Halogen-free part, ex.FMOSAB14N15-H.


Application

- Motor driving in power tool, E-vehicle, robotics.
- Currnet switching in DC/DC & AC/DC(SR) sub-systems.
- Power management in telecom, industrial automation, CE .

Mechanical data

- Epoxy:UL94-V0 rated flame retardant.
- Case : Molded plastic, T3333P8.
- Mounting Position : Any.

Package outline

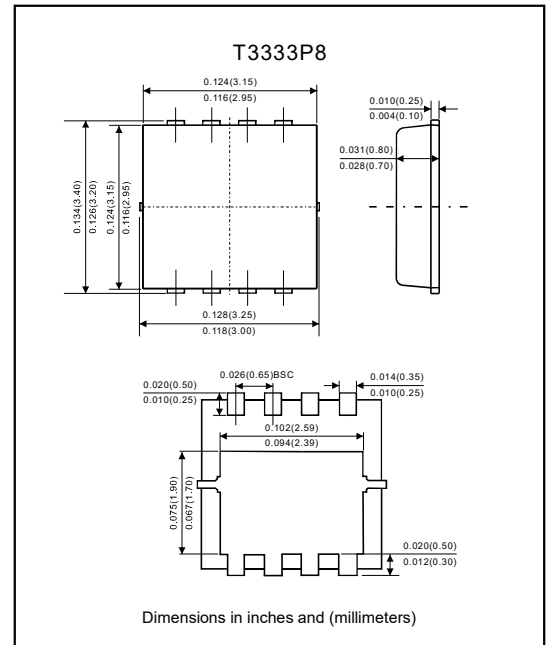Maximum ratings (At $T_j=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Drain-source voltage	V_{DS}	150	V
Gate-source voltage	V_{GS}	± 20	V
Continuous drain current (Note 1)	$T_c=25^\circ C$	I_D	A
	$T_c=100^\circ C$		
Pulsed drain current (Note 2)	I_{DM}	37	A
Avalanche current (Note 3)	I_{AS}	20	A
Avalanche energy (Note 3)	E_{AS}	20	mJ
Power dissipation (Note 4)	$T_c=25^\circ C$	P_D	W
	$T_c=100^\circ C$		
Thermal resistance, junction to ambient	$R_{\theta JA}$	65	$^\circ C/W$
Thermal resistance Junction to case	$R_{\theta JC}$	4.5	$^\circ C/W$
Operating Junction temperature	T_J	+150	$^\circ C$
Storage temperature range	T_{STG}	-55 to +150	$^\circ C$

FMOSAB14N15

Electrical characteristics (At $T_J=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min.	Typ.	Max.	Unit
Static parameters						
Drain-source breakdown voltage	$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$	BV_{DSS}	150			V
Drain-source leakage current	$V_{DS}=120\text{V}$, $V_{GS}=0\text{V}$	I_{DSS}			1.0	μA
	$V_{DS}=120\text{V}$, $V_{GS}=0\text{V}$, $T_J=55^{\circ}\text{C}$				5.0	
Gate-source leakage current	$V_{GS}=\pm 20\text{V}$, $V_{DS}=0\text{V}$	I_{GSS}			± 100	nA
Gate threshold voltage	$V_{GS}=V_{DS}$, $I_D=250\mu\text{A}$	$V_{GS(TH)}$	2.5	3.2	4.5	V
Static drain-source on-resistance	$V_{GS}=10\text{V}$, $I_D=7\text{A}$	$R_{DS(ON)}$		54	65	m Ω
Forward transconductance	$V_{DS}=5\text{V}$, $I_D=7\text{A}$	g_{FS}		10		S

Dynamic parameters (Note 5)

Gate resistance	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $f=1.0\text{MHz}$	R_g		1.6		Ω
Input capacitance	$V_{GS}=0\text{V}$, $V_{DS}=75\text{V}$, $f=1.0\text{MHz}$	C_{iss}		306		pF
Out capacitance		C_{oss}		70		
Reverse transfer capacitance		C_{rss}		3.8		

Switching parameters (Note 5)

Total gate charge	$V_{GS}=10\text{V}$, $V_{DS}=75\text{V}$, $I_D=7\text{A}$	Q_g		5.3		nC
Gate to source charge		Q_{gs}		1.6		
Gate to drain charge		Q_{gd}		1.9		
Turn-on delay time	$V_{DS}=75\text{V}$, $V_{GS}=10\text{V}$, $R_L=10\Omega$, $R_{GEN}=6\Omega$	$t_{d(on)}$		4.3		ns
Rise time		t_r		3.5		
Turn-off delay time		$t_{d(off)}$		7.6		
Fall time		t_f		3.5		

Source-drain diode ratings and characteristics

Maximum body diode continuous current	$T_C=25^{\circ}\text{C}$	I_S			28	A
Drain-source diode forward voltage	$I_S=1\text{A}$, $V_{GS}=0\text{V}$	V_{SD}		0.73	1.0	V
Body diode reverse recovery time	$I_F=7\text{A}$, $dI_F/dt=100\text{A}/\mu\text{s}$	t_{rr}		75		ns
Body diode reverse recovery charge	$I_F=7\text{A}$, $dI_F/dt=100\text{A}/\mu\text{s}$	Q_{rr}		99		nC

Note: 1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.

2. This single-pulse measurement was taken under $T_{J_Max}=150^{\circ}\text{C}$.

3. This single-pulse measurement was taken under the following condition [$L=100\mu\text{H}$, $V_{GS}=10\text{V}$, $V_{DS}=75\text{V}$] while its value is limited by $T_{J_Max}=150^{\circ}\text{C}$.


4. The power dissipation P_D is based on $T_{J_Max}=150^{\circ}\text{C}$.

5. This value is guaranteed by design hence it is not included in the production test.


FMOSAB14N15

Rating and characteristic curves


Saturation characteristics

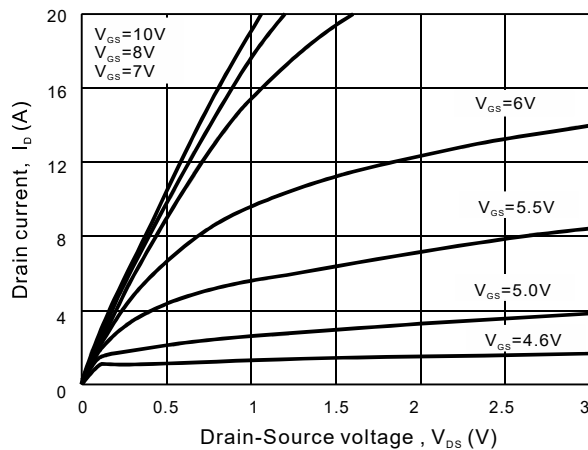


Transfer characteristics

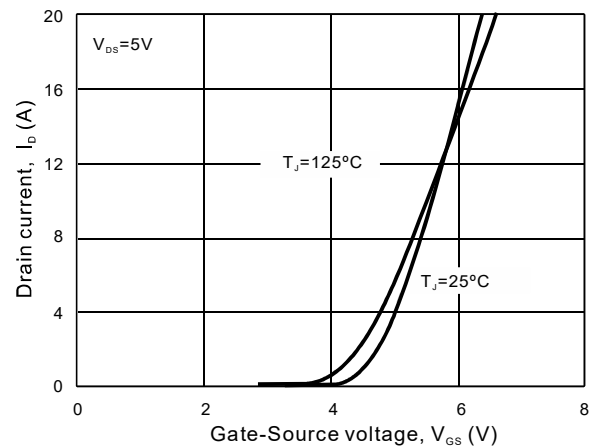


On-resistance vs. Drain current

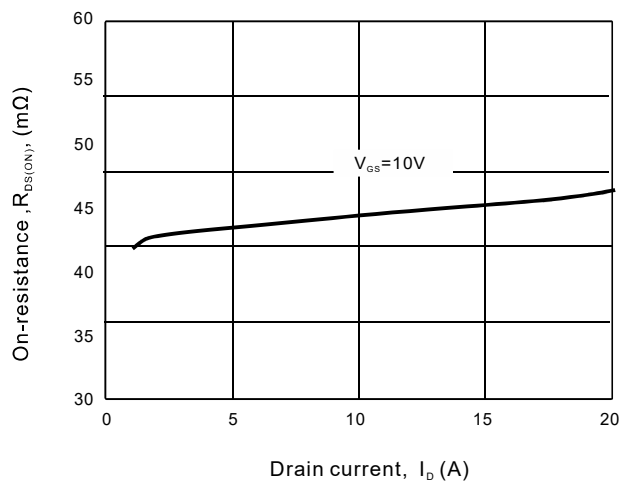


Normalized on-resistance vs. Junction temperature

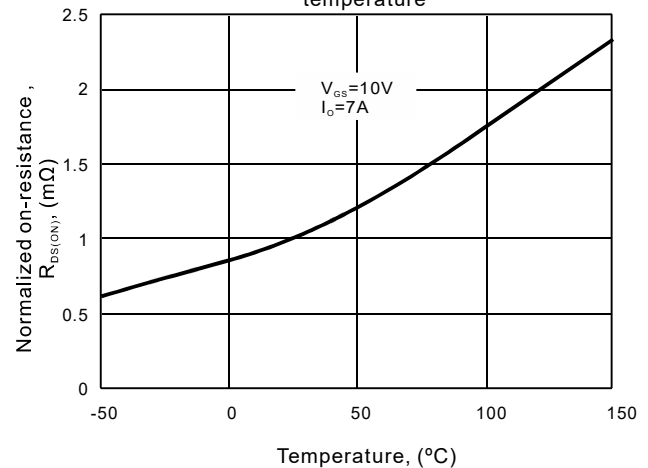

Body-diode characteristics





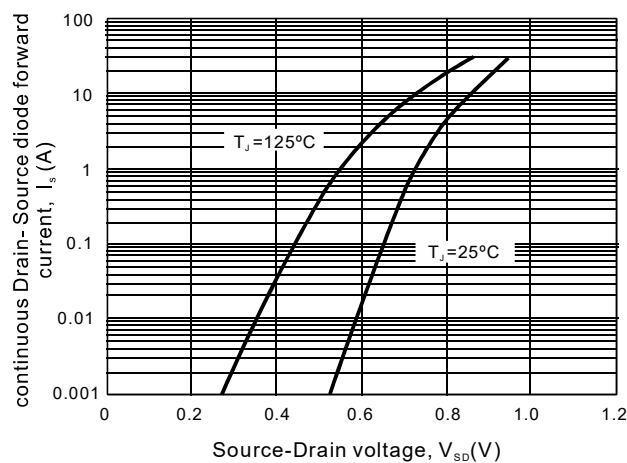


Capacitance characteristics

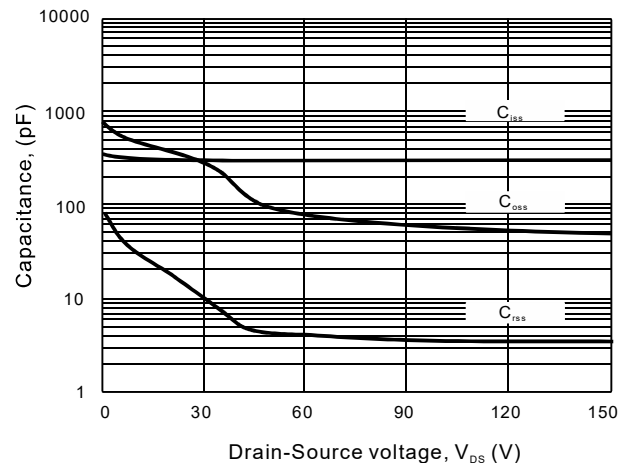


FMOSAB14N15

Rating and characteristic curves

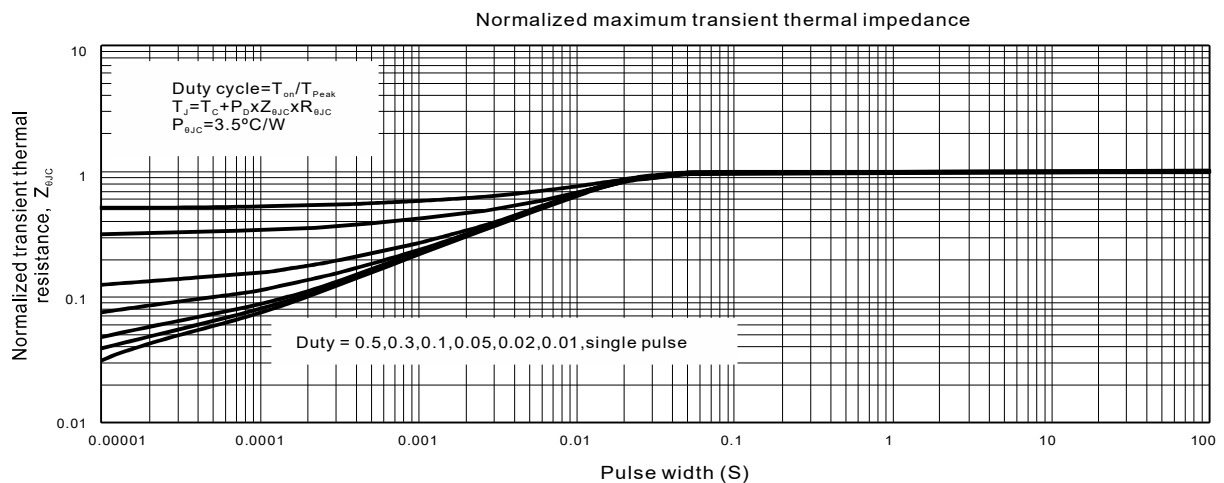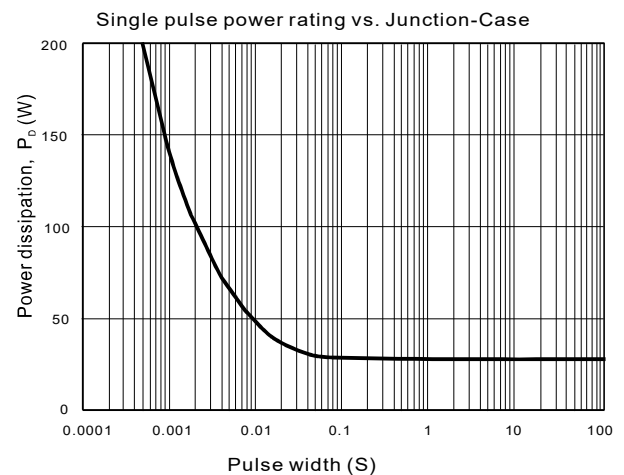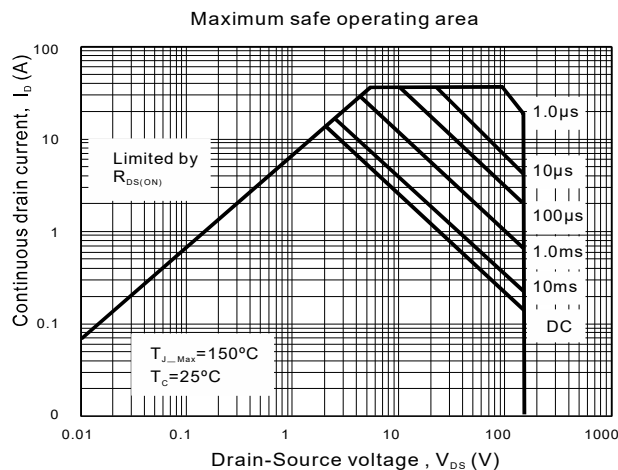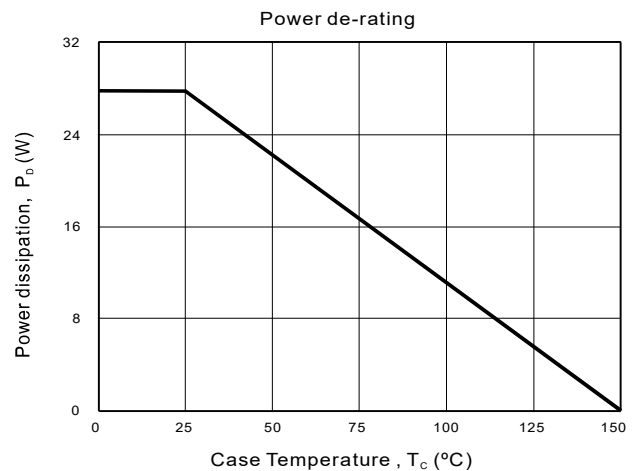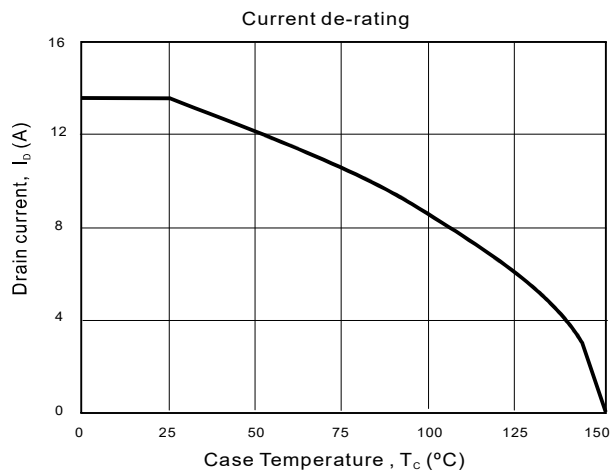

FMOSAB14N15

Rating and characteristic curves

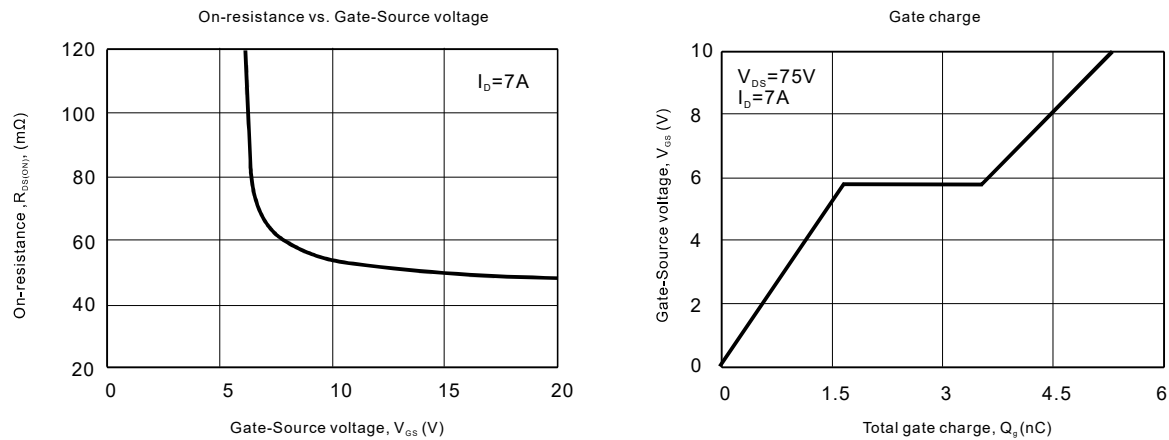


Pinning information

Pin	Simplified outline	Symbol
Pin 1,2,3 Source Pin 4 Gate Pin 5,6,7,8 Drain		

Marking

Type number	Marking Code
FMOSAB14N15	AB14N15


Suggested solder pad layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

FMOSAB14N15

Packing information

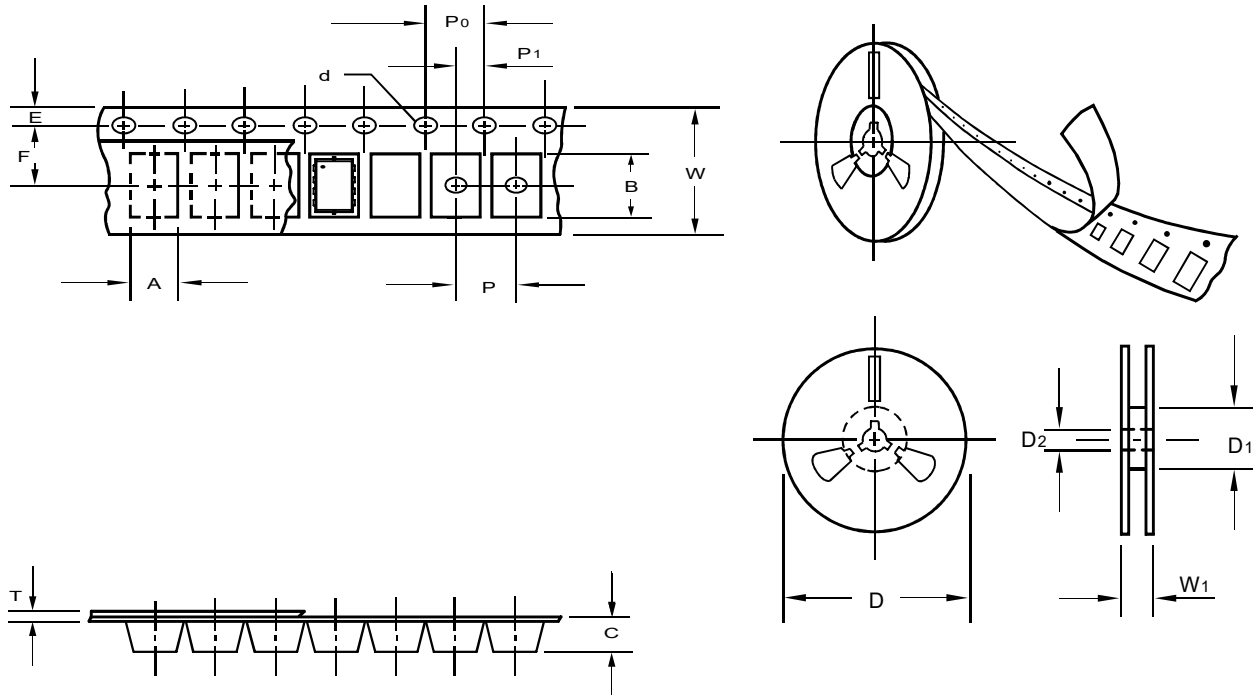

unit:mm

Item	Symbol	Tolerance	T3333P8
Carrier width	A	0.1	3.55
Carrier length	B	0.1	3.55
Carrier depth	C	0.1	1.10
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	100.00
7" Reel outside diameter	D	2.0	-
7" Reel inner diameter	D1	min	-
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	5.50
Punch hole pitch	P	0.1	8.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	12.00
Reel width	W1	1.0	17.60

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


FMOSAB14N15

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)
T3333P8	13"	5,000	8.0	10,000	355*335*38	330	350*330*360	80,000

Suggested thermal profiles for soldering processes

- 1.Storage environment : Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

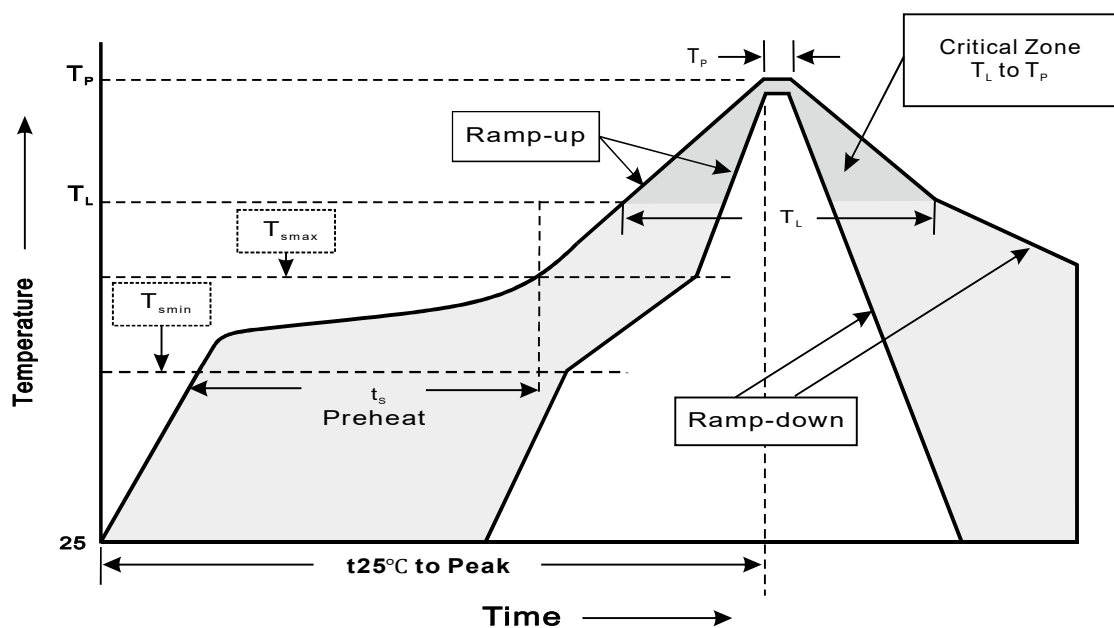

3.Reflow soldering

Profile feature	Soldering Condition
Average ramp-up rate (T_L to T_p)	< 3°C/sec
Preheat -Temperature Min (T_{smin}) -Temperature Max (T_{smax}) -Time (min to max) (t_s)	150°C 200°C 60 ~ 120sec
T_{smax} to T_L -Ramp-up rate	< 3°C/sec
Time maintained above: -Temperature (T_L) -Time(T_L)	217°C 60 ~ 260 sec
Peak Temperature(T_p)	255°C -0/+5°C
Time within 5°C of actual peak Temperature(T_p)	10 ~ 30sec
Ramp-down rate	< 6°C/sec
Time 25°C to peak temperature	< 6 minutes