

FMOSAG6066

List

List.....1

Package outline.....2

Features.....2

Applications.....2

Mechanical data.....2

Maximum ratings2

Electrical characteristics.....3

Rating and characteristic curves.....4~5

Pinning information.....6

Marking.....6

Packing information.....7

Reel packing.....8

Suggested thermal profiles for soldering processes.....8

FMOSAG6066

60A 60V N-Channel Enhancement Mode Power MOSFET

Features

- $V_{DS}=60V$, $I_D=60A$.
- $R_{DS(ON)} \leq 5.2m\Omega$, @ $V_{GS}=10V$, $I_D=20A$.
- $R_{DS(ON)} \leq 7.8m\Omega$, @ $V_{GS}=4.5V$, $I_D=10A$.
- Low gate charge and low on-resistance.
- Advanced trench MOS technology.
- 100% E_{AS} guaranteed.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen-free part, ex.FMOSAG6066-H.


Application

- Motor control.
- DC/DC converter.
- Synchronous rectifier applications.

Mechanical data

- Epoxy:UL94-V0 rated flame retardant.
- Case : Molded plastic, T3030P8 (DFN3030-8).
- Mounting Position : Any.

Package outline

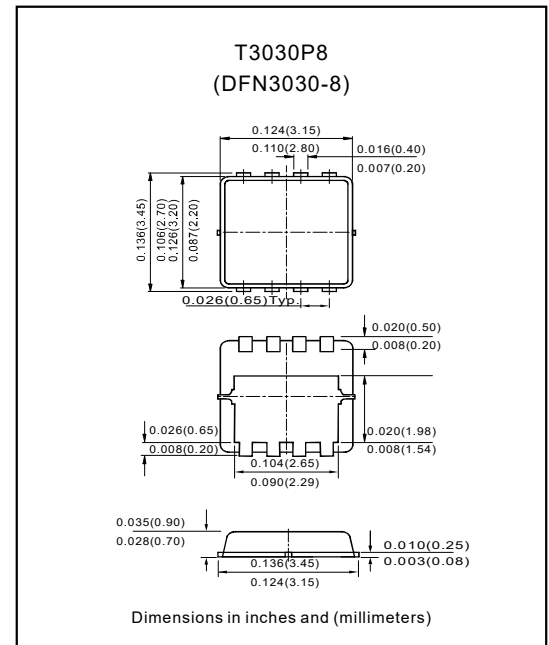

Maximum ratings (At $T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Drain-source voltage	V_{DS}	60	V
Gate-source voltage	V_{GS}	± 20	V
Continuous drain current (Note1,6)	I_D	($T_c=25^\circ C$) 60	A
		($T_c=100^\circ C$) 37	
Pulsed drain current (Note2)	I_{DM}	130	A
Avalanche current	I_{AS}	43	A
Single pulse avalanche energy (Note3)	E_{AS}	92.5	mJ
Power dissipation (Note4)	P_D	44.6	W
Thermal resistance, junction to ambient (note1) ($t \leq 10s$)	$R_{\theta JA}$	25	$^\circ C/W$
Thermal resistance, junction to ambient (note1) (Steady state)		55	
Thermal resistance, junction to case (note1)	$R_{\theta JC}$	2.8	$^\circ C/W$
Operating junction temperature	T_J	+150	$^\circ C$
Storage temperature range	T_{STG}	-55 to +150	$^\circ C$

FMOSAG6066

Electrical characteristics (At $T_J=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
-----------	--------	------------	------	------	------	------

Off characteristics

Drain-source breakdown voltage	BV_{DSS}	$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$	60			V
Drain-source leakage current	I_{DSS}	$V_{DS}=48\text{V}$, $V_{GS}=0\text{V}$			1	μA
		$V_{DS}=48\text{V}$, $V_{GS}=0\text{V}$, $T_J=55^{\circ}\text{C}$			5	
Gate-source leakage current	I_{GSS}	$V_{GS}=\pm 20\text{V}$, $V_{DS}=0\text{V}$			± 100	nA

On characteristics

Gate threshold voltage	$V_{GS(TH)}$	$V_{GS}=V_{DS}$, $I_D=250\mu\text{A}$	1.2	1.65	2.3	V
Drain-Source on-state resistance (Note2)	$R_{DS(ON)}$	$V_{GS}=10\text{V}$, $I_D=20\text{A}$		4.4	5.2	m Ω
		$V_{GS}=4.5\text{V}$, $I_D=10\text{A}$		6.4	7.8	
Gate resistance	R_g	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $f=1.0\text{MHz}$		1.3		Ω

Dynamic parameters

Input capacitance	C_{iss}	$V_{GS}=0\text{V}$, $V_{DS}=30\text{V}$, $f=1.0\text{MHz}$		1625		pF
Out capacitance	C_{oss}			438		
Reverse transfer capacitance	C_{rss}			25		

Switching parameters

Total gate charge	Q_g	$V_{GS}=10\text{V}$, $V_{DS}=30\text{V}$, $I_D=20\text{A}$		33.4		nC
		$V_{GS}=4.5\text{V}$, $V_{DS}=30\text{V}$, $I_D=20\text{A}$		17.8		
Gate to source charge	Q_{gs}	$V_{GS}=10\text{V}$, $V_{DS}=30\text{V}$, $I_D=20\text{A}$		5.8		
Gate to drain charge	Q_{gd}			7.9		
Turn-on delay time	$t_{d(on)}$	$V_{DD}=30\text{V}$, $V_{GS}=10\text{V}$, $R_g=3.3\Omega$, $I_D=20\text{A}$		7.5		ns
Rise time	t_r			6		
Turn-off delay time	$t_{d(off)}$			29		
Fall time	t_f			7.5		

Source-drain diode ratings and characteristics

Drain-source diode forward voltage (Note2)	V_{SD}	$I_S=1\text{A}$, $V_{GS}=0\text{V}$			1.2	V
Continuous source current (Note1,5,6)	I_S	$V_G=V_D=0\text{V}$, Force current			60	A
Reverse recovery time	t_{rr}	$I_F=20\text{A}$, $dI/dt=400\text{A}/\mu\text{s}$		23		nS
Reverse recovery charge	Q_{rr}			60		nC

Note: 1. The data tested by surface mounted on a 1 inch² FR-4 board with 2oz copper.

2. Single pulse width limited by junction temperature $T_{J(Max)}=150^{\circ}\text{C}$

3. The E_{AS} data shows maximum rating. The test condition is $V_{DD}=25\text{V}$, $V_{GS}=10\text{V}$, $L=0.1\text{mH}$, $I_{AS}=43\text{A}$.







4. The power dissipation is limited by 150°C junction temperature.

5. The data is theoretically the same as I_D and I_{DM} , in real application, should be limited by total power dissipation.

6. The maximum current rating is package limited.


FMOSAG6066

Rating and characteristic curves

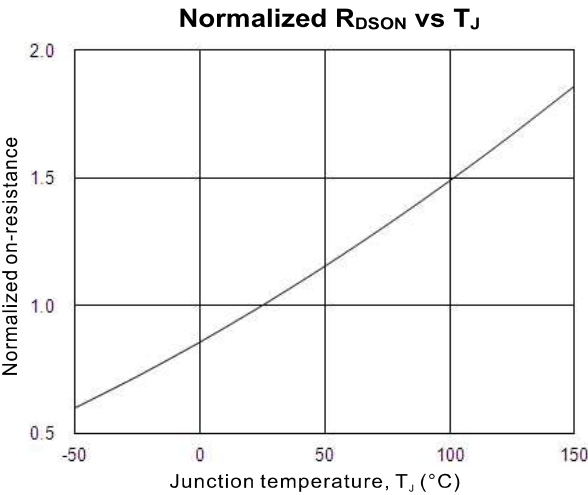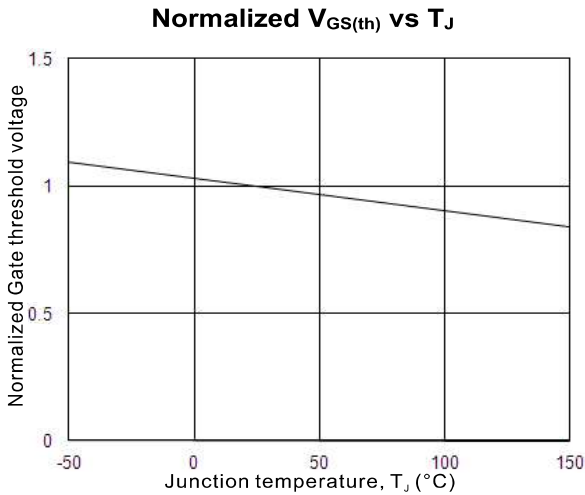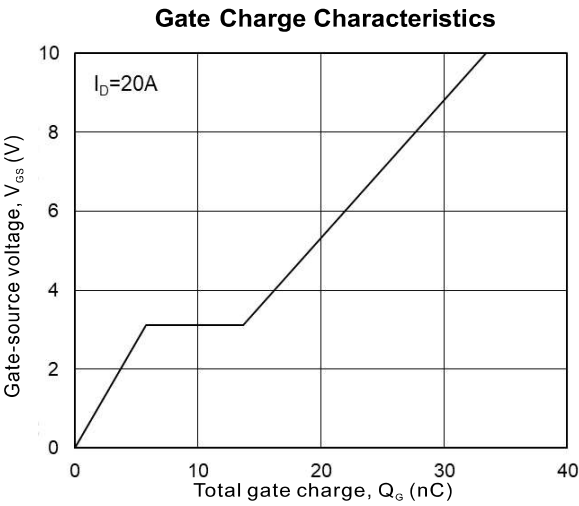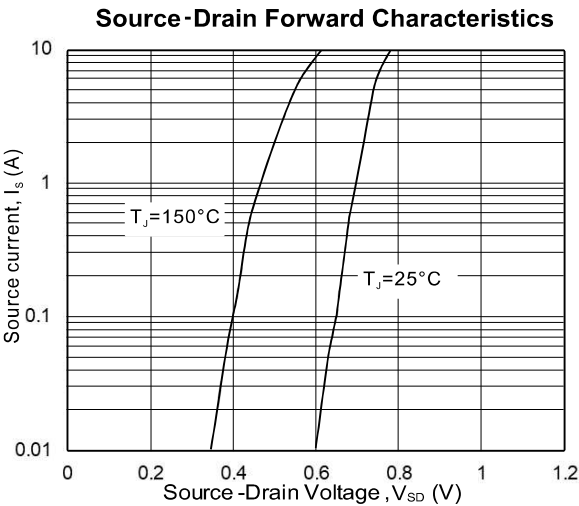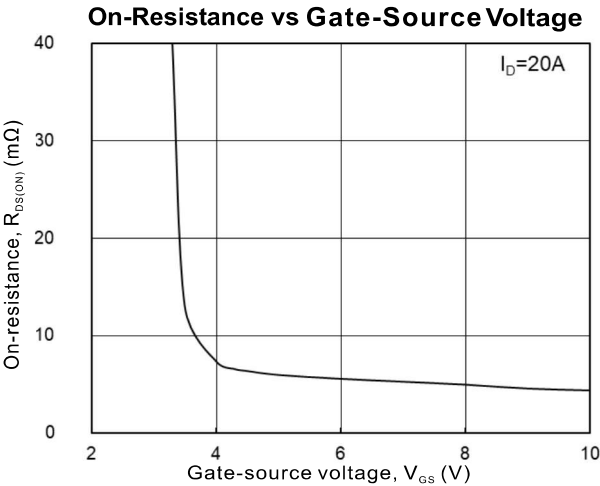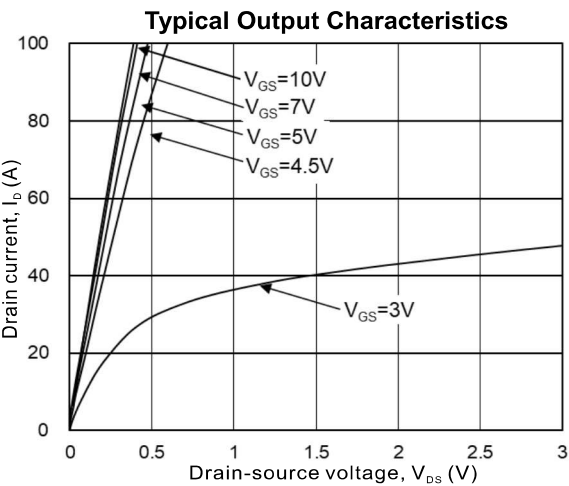



FMOSAG6066

Rating and characteristic curves

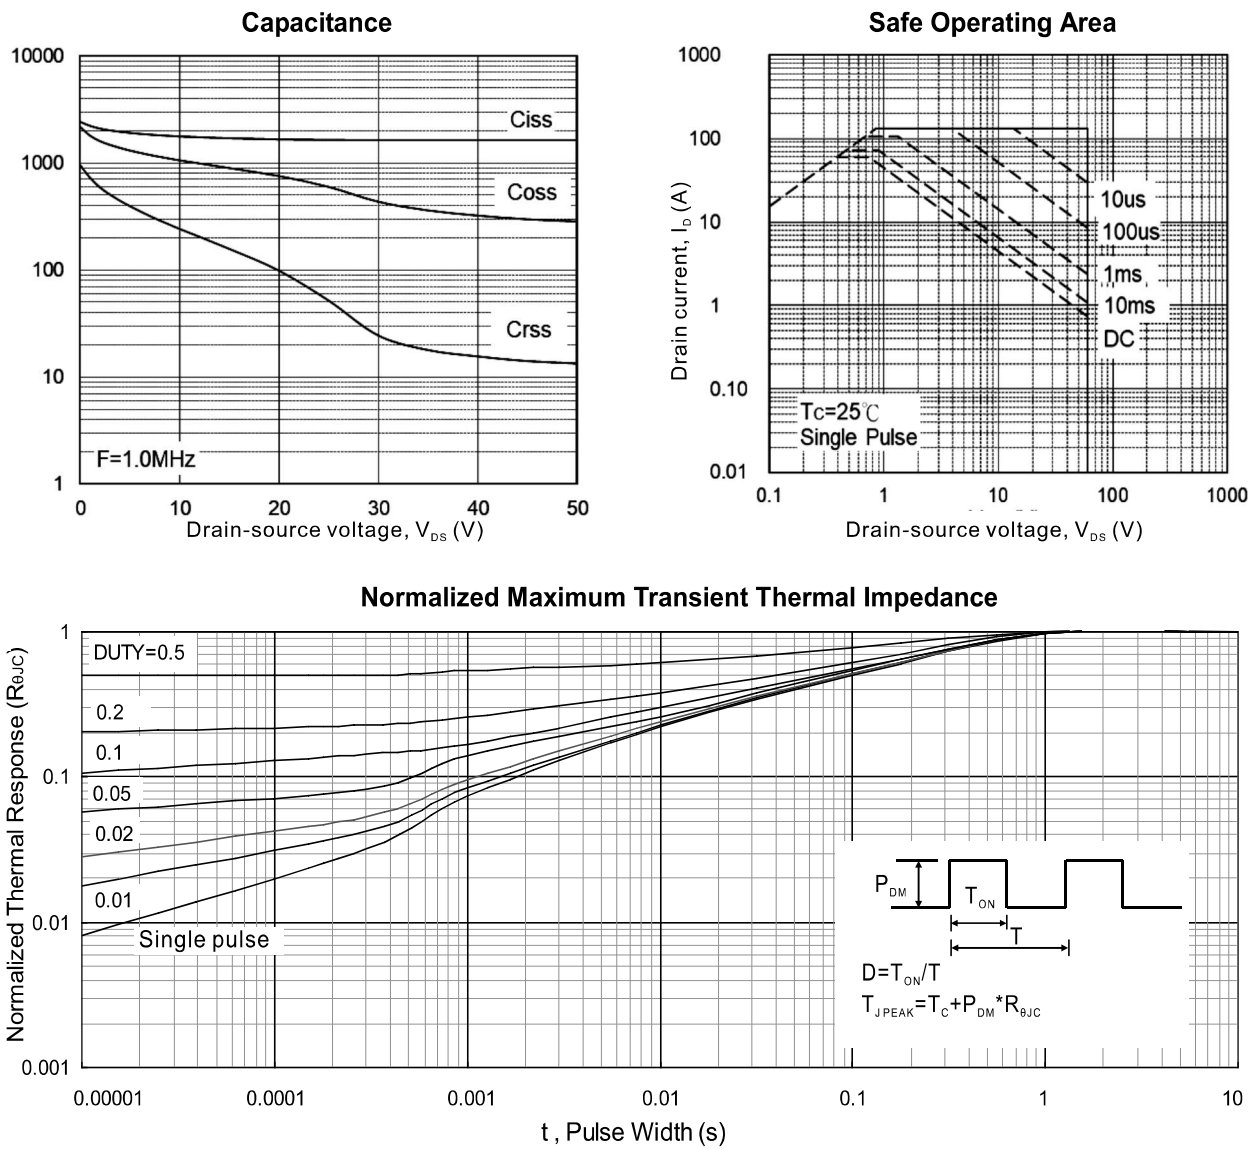

FMOSAG6066

Pinning information


Pin	Simplified outline	Symbol
Pin 1 Source Pin 2 Source Pin 3 Source Pin 4 Gate Pin 5,6,7,8 Drain		

Marking

Type number	Marking code
FMOSAG6066	AG6066

FMOSAG6066

Packing information

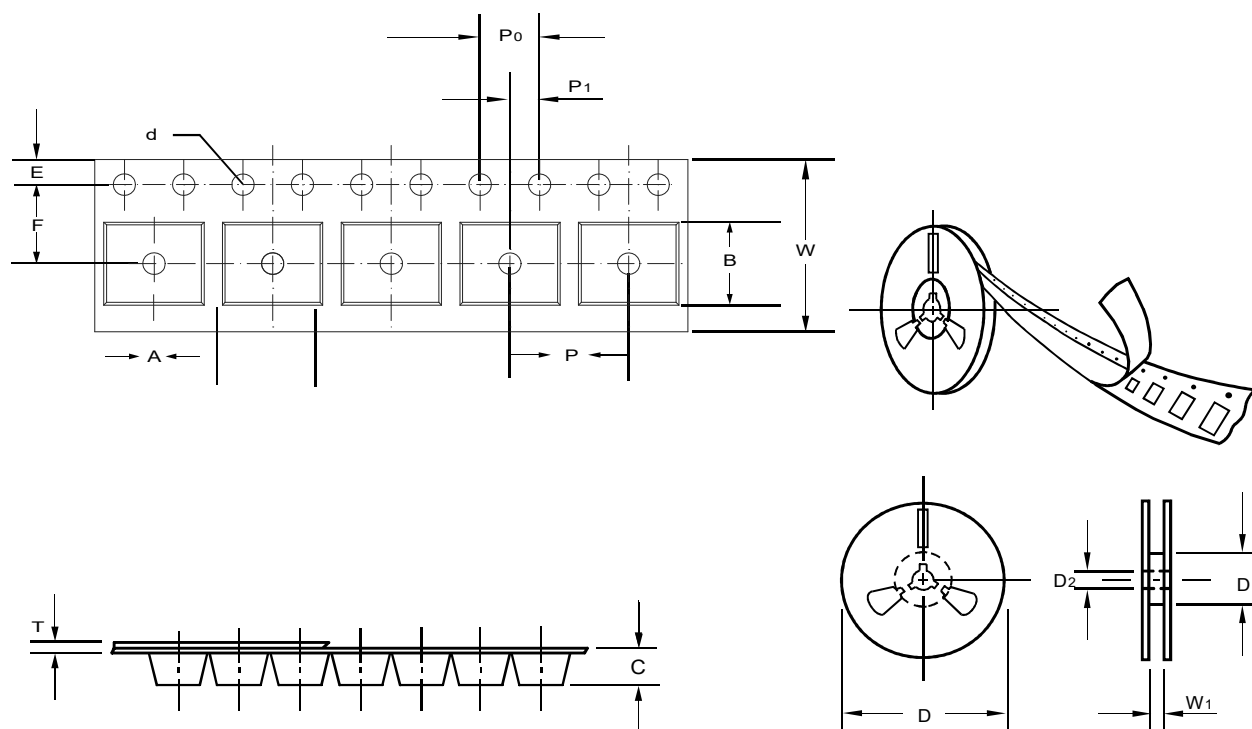

unit:mm

Item	Symbol	Tolerance	T3030P8 (DFN3030-8)
Carrier width	A	0.1	3.35
Carrier length	B	0.1	3.20
Carrier depth	C	0.1	1.10
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.0
7" Reel inner diameter	D1	min	59.5
Feed hole diameter	D2	0.5	13.0
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.0
Sprocket hole pitch	P0	0.1	4.0
Embossment center	P1	0.1	2.0
Overall tape thickness	T	0.05	0.23
Tape width	W	0.3	8.0
Reel width	W1	2.0	8.4

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


FMOSAG6066

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)
T3030P8	7"	3,000	8.0	30,000	183*123*183	178	382*257*387	240,000

Suggested thermal profiles for soldering processes

- 1.Storage environment : Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

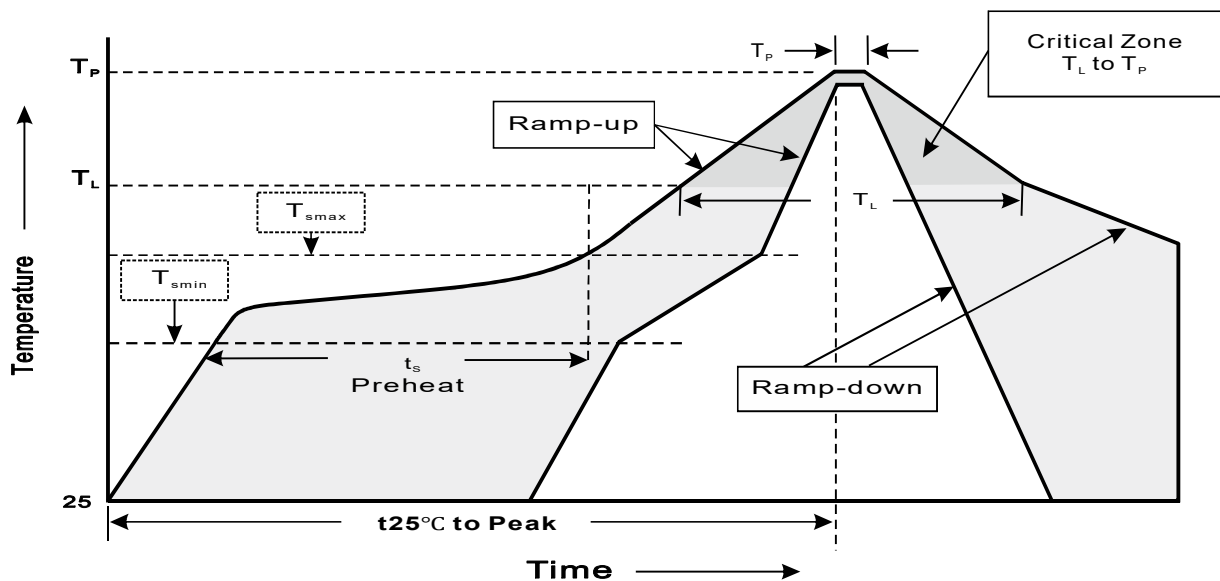

3.Reflow soldering

Profile feature	Soldering Condition
Average ramp-up rate (T_L to T_P)	< 3°C/sec
Preheat -Temperature Min (T_{smin}) -Temperature Max (T_{smax}) -Time (min to max) (t_s)	150°C 200°C 60 ~ 120sec
T_{smax} to T_L -Ramp-up rate	< 3°C/sec
Time maintained above: -Temperature (T_L) -Time(T_L)	217°C 60 ~ 260 sec
Peak Temperature(T_P)	255°C -0/+5°C
Time within 5°C of actual peak Temperature(T_P)	10 ~ 30sec
Ramp-down rate	< 6°C/sec
Time 25°C to peak temperature	< 6 minutes