

FM220-M-Q1 THRU FM2200-M-Q1

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings and Electrical characteristics	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Suggested solder pad layout.....	4
Packing information.....	5
Reel packing.....	6
Suggested thermal profiles for soldering processes.....	6
High reliability test capabilities.....	7

FM220-M-Q1 THRU FM2200-M-Q1

2.0A Surface Mount Schottky Barrier Rectifiers 20V-200V


Features

- Batch process design, excellent power dissipation offers better reverse leakage current and thermal resistance
- Low profile surface mounted application in order to optimize board space
- Tiny plastic SMD package
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Guardring for overvoltage protection
- Ultra high-speed switching
- Silicon epitaxial planar chip, metal silicon junction
- Lead-free parts meet RoHS requirements
- Qualified to AEC-Q101 standards for high reliability
- Suffix "-H" indicates Halogen free parts, ex. FM220-M-Q1-H

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-123 / MINI SMA
- Terminals :Plated terminals, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any
- Weight : Approximated 0.018 gram

Package outline

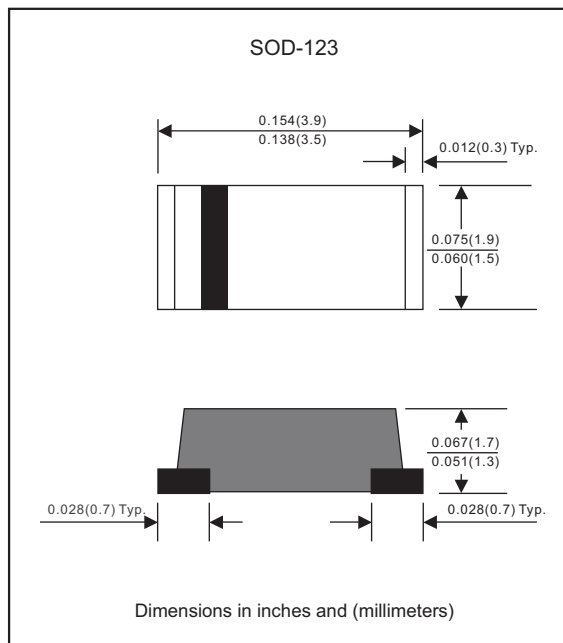

Maximum ratings (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	FM220-M-Q1	FM230-M-Q1	FM240-M-Q1	FM250-M-Q1	FM260-M-Q1	FM280-M-Q1	FM2100-M-Q1	FM2150-M-Q1	FM2200-M-Q1	UNIT
Maximum repetitive peak reverse voltage	VRRM	20	30	40	50	60	80	100	150	200	V
Maximum RMS voltage	VRMS	14	21	28	35	42	56	70	105	140	V
Maximum continuous reverse voltage	VR	20	30	40	50	60	80	100	150	200	V
Maximum average forward rectified current	Io	2.0									A
Non-repetitive peak forward surge current 8.3ms single half sine-wave	IFSM	50									A
Typical junction capacitance (Note 1)	CJ	110			80		60		45	35	pF
Operating junction temperature range	TJ	-55 to +125			-55 to +150						°C
Storage temperature range	TSTG	-65 to +175									°C

Electrical characteristics (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOLS	FM220-M-Q1	FM230-M-Q1	FM240-M-Q1	FM250-M-Q1	FM260-M-Q1	FM280-M-Q1	FM2100-M-Q1	FM2150-M-Q1	FM2200-M-Q1	UNIT
Maximum instantaneous forward voltage at $I_F=2.0\text{A}$	V_F	0.50			0.70		0.85		0.90	0.92	V
Maximum reverse leakage current at rated V_R $T_J=25^{\circ}\text{C}$ $T_J=100^{\circ}\text{C}$	I_R					0.5 10					mA mA

Thermal characteristics

PARAMETER	SYMBOLS	FM220-M-Q1	FM230-M-Q1	FM240-M-Q1	FM250-M-Q1	FM260-M-Q1	FM280-M-Q1	FM2100-M-Q1	FM2150-M-Q1	FM2200-M-Q1	UNIT
Typical thermal resistance junction to ambient (Note2)	$R_{\theta JA}$	88									$^{\circ}\text{C/W}$
Typical thermal resistance junction to case (Note 2)	$R_{\theta JC}$	44									$^{\circ}\text{C/W}$

Notes1: Measured at 1MHz and applied reverse voltage of 4.0V D.C

2: Mounted on FR-4 PCB copper, minimum recommended pad layout

Rating and characteristic curves (FM220-M-Q1 THRU FM2200-M-Q1)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

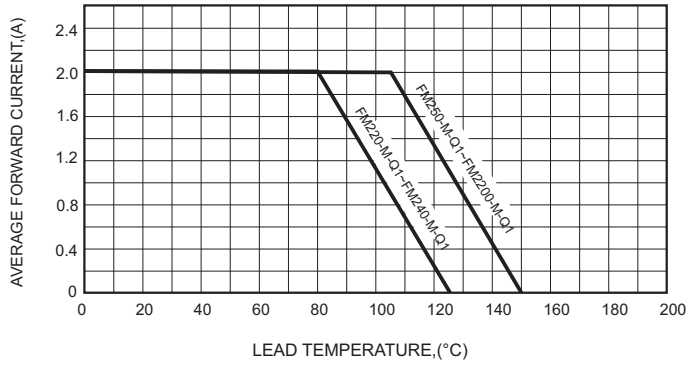


FIG.2-TYPICAL FORWARD CHARACTERISTICS

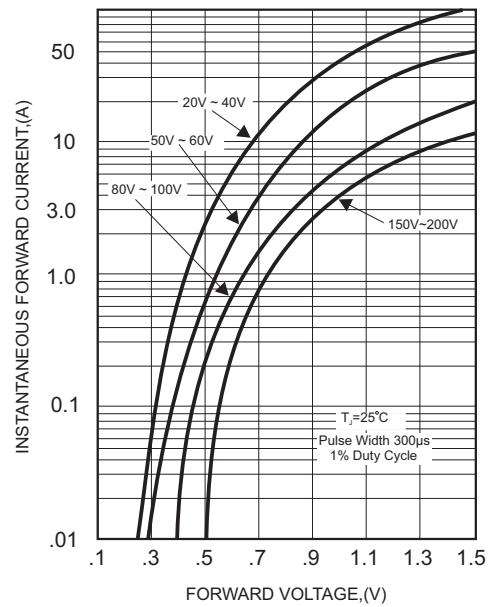


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

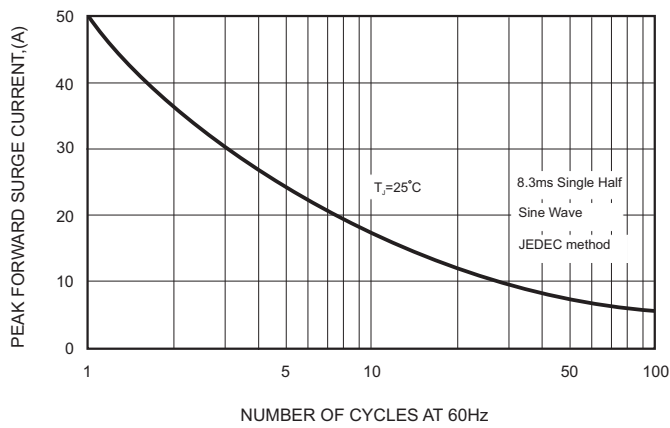


FIG.5 - TYPICAL REVERSE CHARACTERISTICS


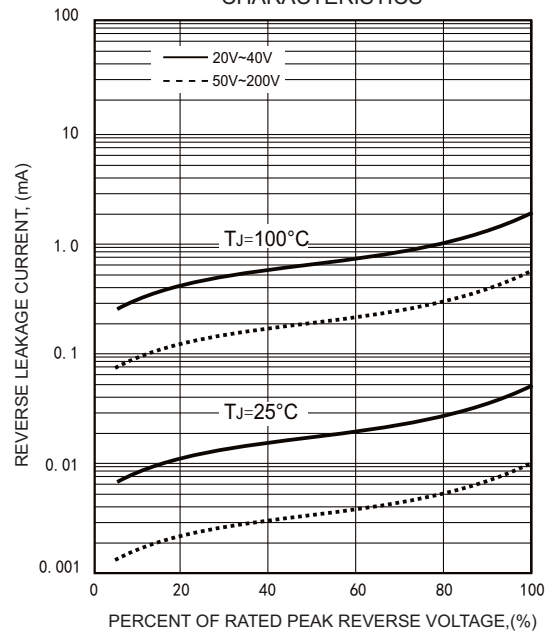


FIG.4-TYPICAL JUNCTION CAPACITANCE

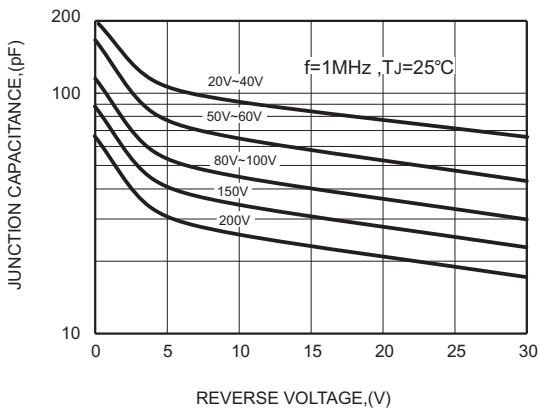


FM220-M-Q1 THRU FM2200-M-Q1**Pinning information**

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
FM220-M-Q1	22
FM230-M-Q1	23
FM240-M-Q1	24
FM250-M-Q1	25
FM260-M-Q1	26
FM280-M-Q1	28
FM2100-M-Q1	20
FM2150-M-Q1	215
FM2200-M-Q1	220

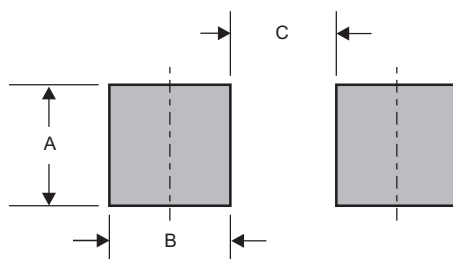
Suggested solder pad layout

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-123	0.075 (1.90)	0.055 (1.40)	0.075 (1.90)

FM220-M-Q1 THRU FM2200-M-Q1

Packing information

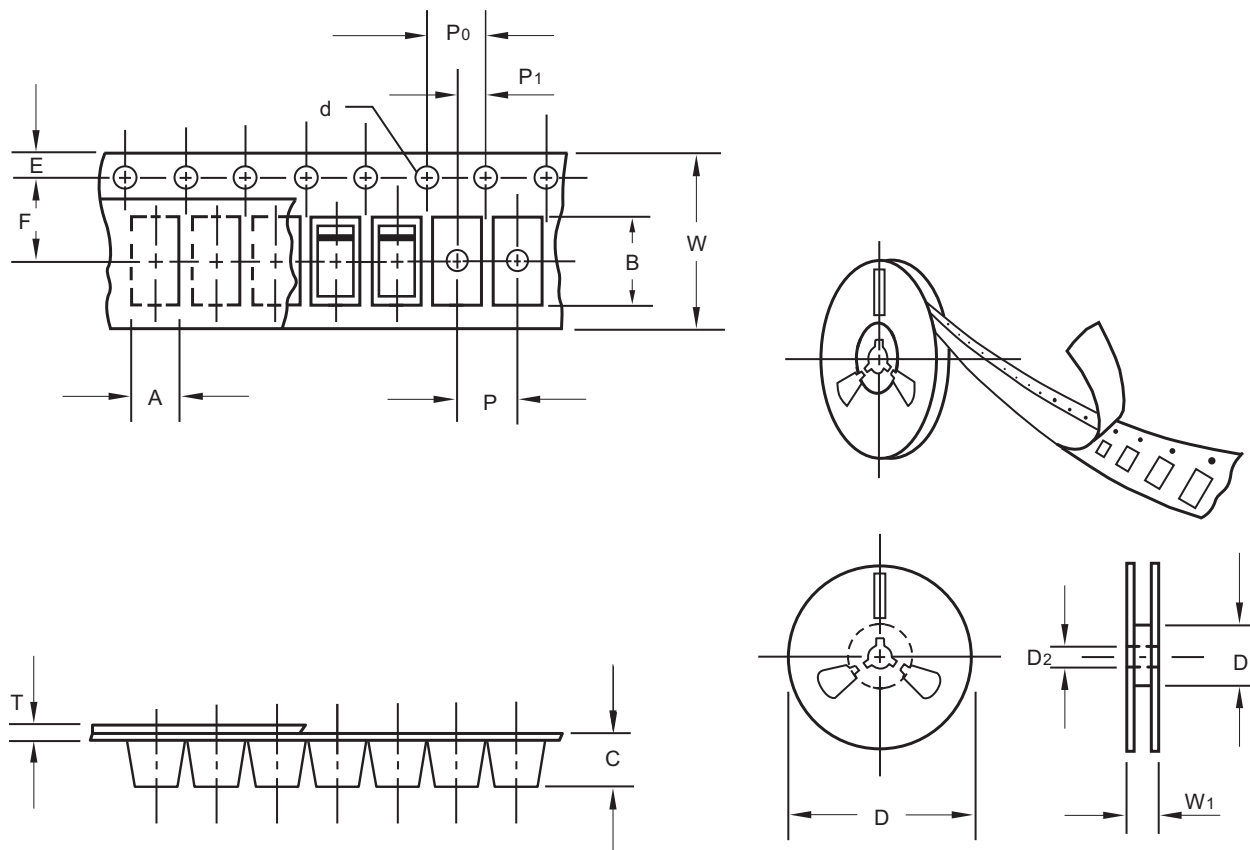

unit:mm

Item	Symbol	Tolerance	SOD-123
Carrier width	A	0.1	1.90
Carrier length	B	0.1	3.90
Carrier depth	C	0.1	1.68
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	11.40

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


FM220-M-Q1 THRU FM2200-M-Q1

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-123	7"	2,500	4.0	25,000	183*123*183	178	382*257*387	200,000	10.5

Suggested thermal profiles for soldering processes

- Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- Reflow soldering of surface-mount devices

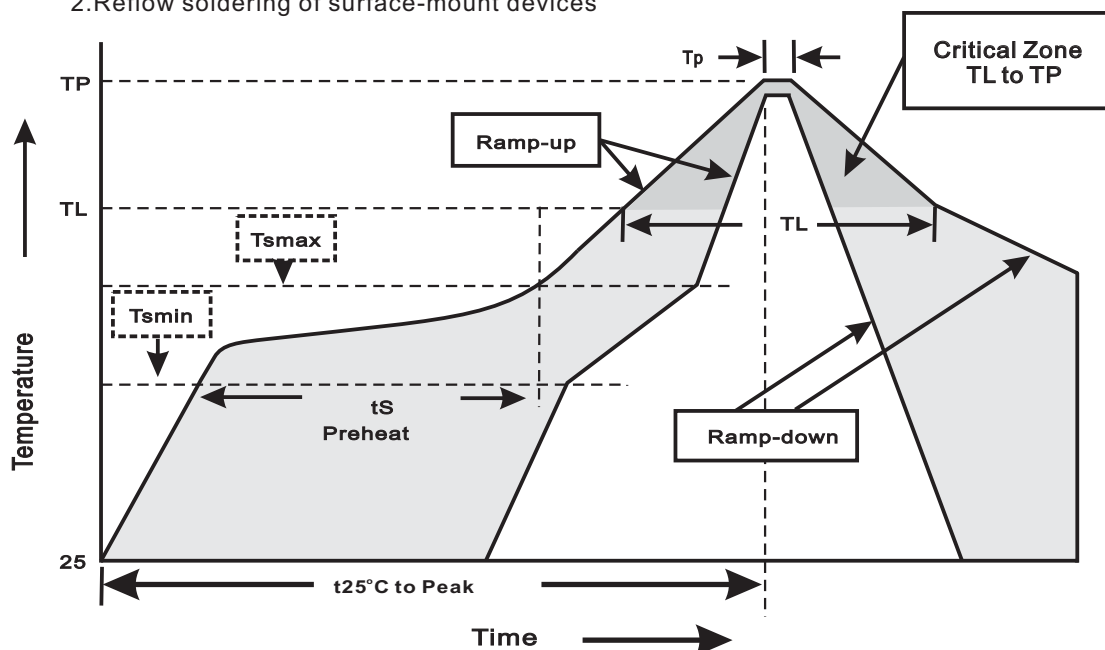

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T _L to T _P)	<3°C/sec
Preheat -Temperature Min(T _{smmin}) -Temperature Max(T _{smmax}) -Time(min to max)(t _s)	150°C 200°C 60~120sec
T _{smmax} to T _L -Ramp-upRate	<3°C/sec
Time maintained above: -Temperature(T _L) -Time(t _L)	217°C 60~260sec
Peak Temperature(T _P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t _P)	10~30sec
Ramp-down Rate	<6°C/sec
Time 25°C to Peak Temperature	<6minutes

FM220-M-Q1 THRU FM2200-M-Q1**High reliability test capabilities**

Item Test	Conditions	Reference
1. MSL Preconditioning	24hr bake@125°C+168hrs@85°C /85%RH+3xIR@260°C+1flux immersion+alcohol+DI H2O rinse	JESD22-A113
2. Operation Life	Ta=25°C,Rated Current (Io=Io max.)Test Duration:1000hrs	MIL-STD-750E METHOD 1027.3
3. High Temperature Reverse Bias	80% Rated VR (Tj=Tj max.)Test Duration:1000hrs	JESD22-A108
4. High Temperature Storage Life	Ta=125°C Test Duration:1000hrs	JESD22 A-103
5. Temperature Cycle	-55°C(15min) to 150°C(15min)Test Cycles:1000cycles	JESD22 A-104
6. Autoclave	P=2atm Ta=121°C RH=100% Test Duration:96hrs	JESD22 A-102
7. Intermittent Operational Life	Ta=25°C,On/Io Max. 2min, Off/2min, Test Cycles:15000cycles	MIL-STD-750E METHOD 1037
8. Solderability	245±5°C for 5sec	J-STD-002
9. Moisture Resistance	Ta=85°C/85% Relative humidity Test Duration:1000hrs	MIL-STD-750E METHOD 1021.2
10. Resistance To Solder Heat	260±5°C for 10sec	JESD22 B-106
11. High Temperature High Humidity Reverse Bias	Ta=85°C, 85%RH, with device reverse biased at 80% of rated breakdown voltage up to a maximum of 100V or limit of chamber Test Duration:1000hrs	JESD22-A101