

MBR3040WT Thru MBR30200WT

List

List.....1

Package outline.....2

Features.....2

Mechanical data.....2

Maximum ratings and electrical characteristics2

Rating and characteristic curves.....3

Pinning information.....4

Marking.....4

Tube packing.....4

Suggested thermal profiles for soldering processes.....5

High reliability test capabilities.....6

MBR3040WT Thru MBR30200WT

30Amp Power Schottky Barrier Rectifiers : 40V-200V


Features

- The plastic package carries underwriters laboratory flame ability classification 94V-0.
- Construction utilizes void-free molded plastic technique.
- Low reverse leakage.
- High forward surge current capability.
- High temperature soldering guaranteed 250°C/10s at terminals.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228
- Suffix "-H" indicates Halogen-free parts, ex. MBR3040WT-H.

Mechanical data

- Case : JEDEC TO-247(TO-3P) molded plastic body over passivated chip.
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026.
- Polarity : Polarity symbol marking on body.
- Mounting Position : Any
- Weight : TO-247(TO-3P) Approximated 5.61 gram

Package outline

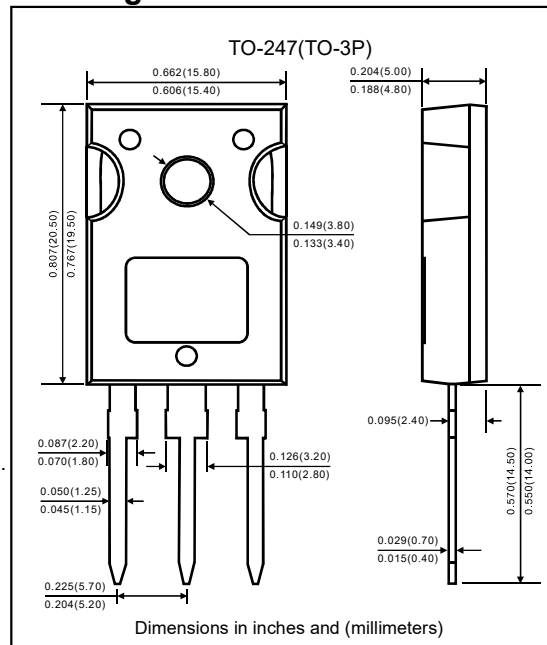

Maximum ratings and electrical characteristics

Ratings at 25 ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	MBR 3040WT	MBR 3045WT	MBR 3060WT	MBR 30100WT	MBR 30150WT	MBR 30200WT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	40	45	60	100	150	200	V
Maximum RMS voltage	V _{RMS}	28	31.5	42	70	105	140	V
Maximum DC blocking voltage	V _{DC}	40	45	60	100	150	200	V
Maximum average forward rectified per device	I _(AV)	30.0						A
Current at T _c =110°C per device		15.0						
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	200						A
Maximum instantaneous forward voltage per diode at 15.0A	V _F	0.55		0.70	0.85	0.95		V
Maximum DC reverse current (T _A =25°C)	I _R	0.5			0.05			mA
At rated DC blocking voltage (T _A =125°C)		50			10			
Typical thermal resistance	R _{θJC}	2.8						°C/W
Operating junction temperature range	T _J	-55 to +150						°C
Storage temperature range	T _{STG}	-55 to +150						°C

MBR3040WT Thru MBR30200WT

Rating and characteristic curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

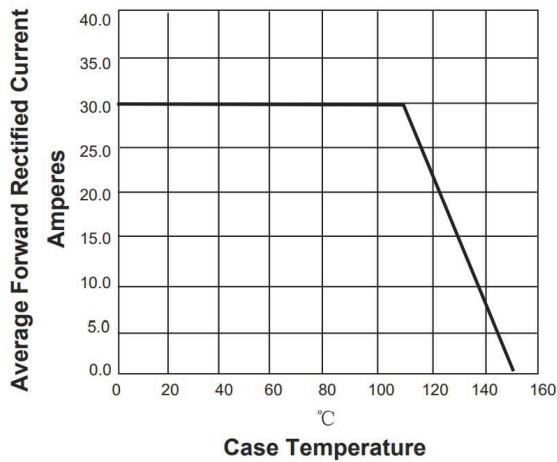


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

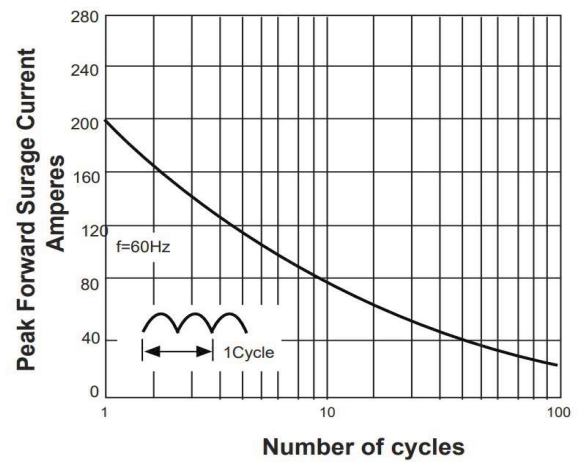


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS




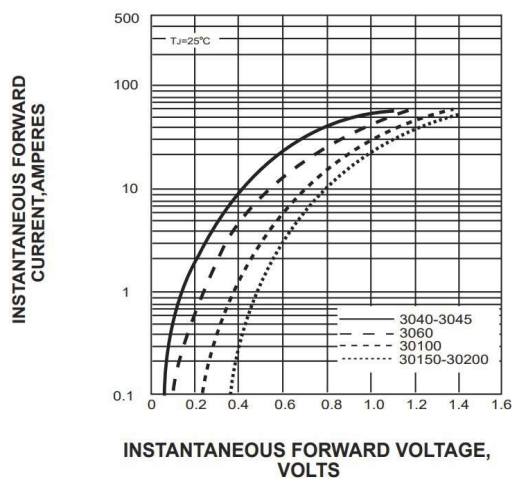


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

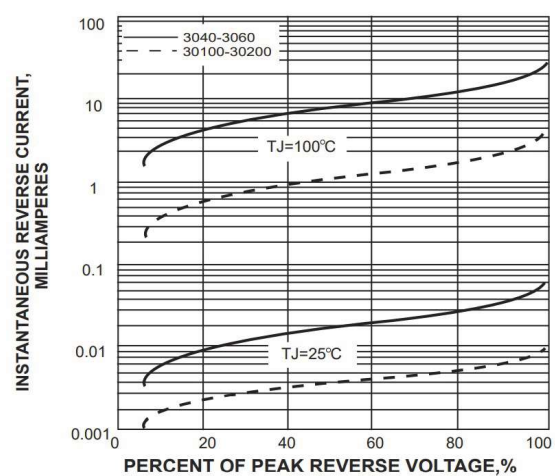

MBR3040WT Thru MBR30200WT

Pinning information

Pin	Simplified outline	Symbol
Pin1 Anode Pin2 Cathode Pin3 Anode		

Marking


Type number	Marking code
MBR3040WT	MBR3040PT
MBR3045WT	MBR3045PT
MBR3060WT	MBR3060PT
MBR30100WT	MBR30100PT
MBR30150WT	MBR30150PT
MBR30200WT	MBR30200PT

Tube packing

Package	Tube (mm)	Q'Ty/Tube (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
TO-247(TO-3P)	510 x 45.5 x 7.8	0.03	545x150 x4.5	0.45	570 x 260 x150	2.25

MBR3040WT Thru MBR30200WT**Suggested thermal profiles for soldering processes**

1. Lead free temperature profile wave-soldering

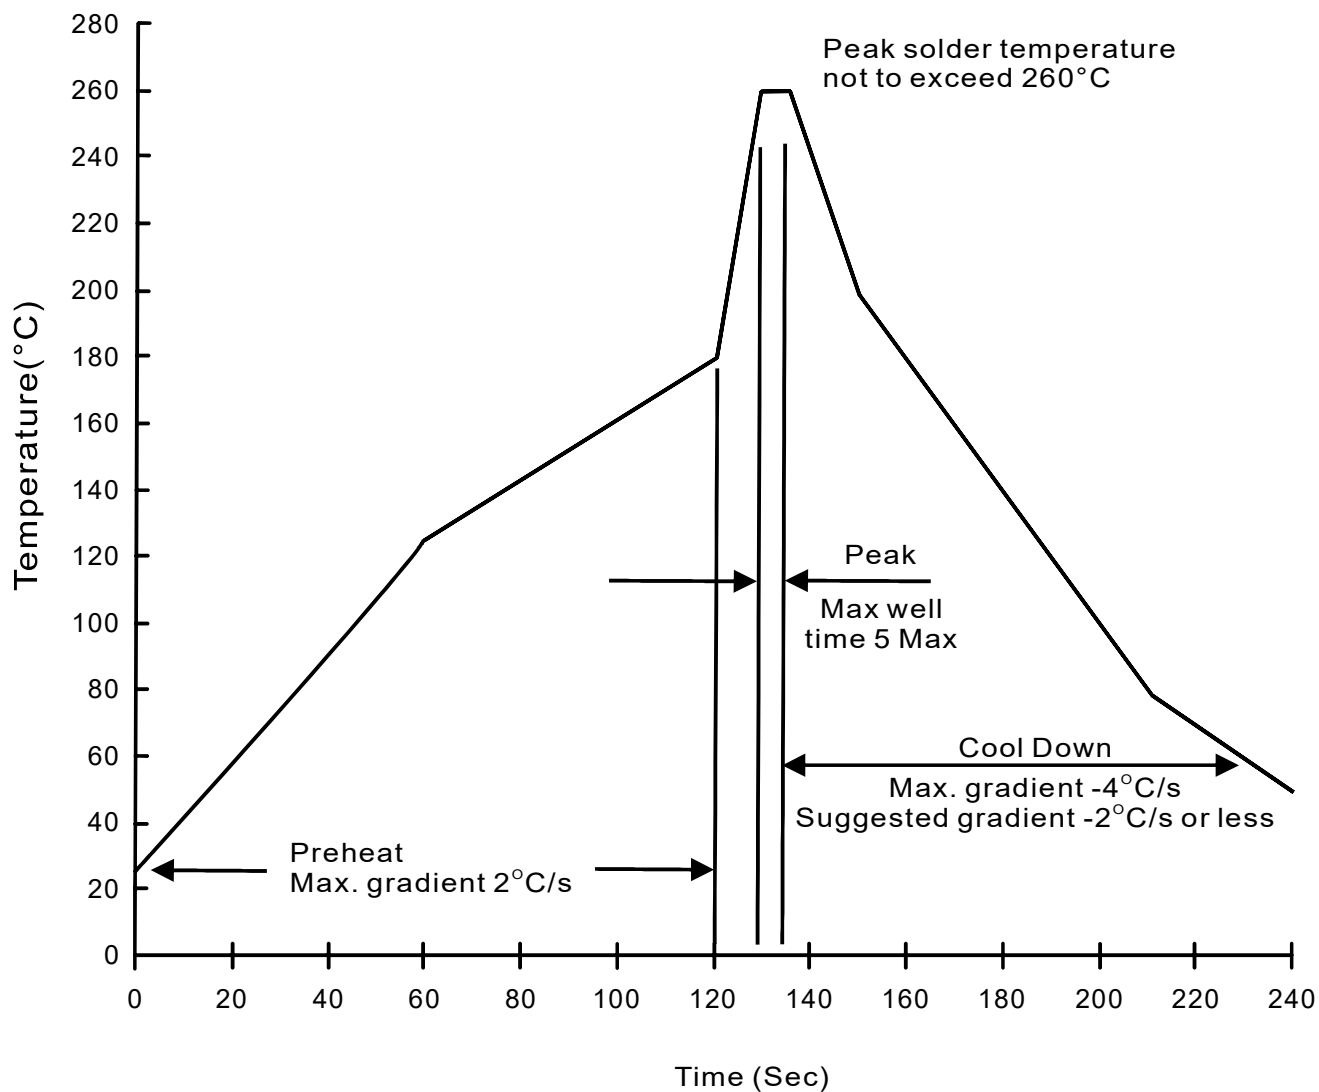

MBR3040WT Thru MBR30200WT**High reliability test capabilities**

Item Test	Conditions	Reference
1. Solder Resistance	at $260 \pm 5^\circ\text{C}$ for $10 \pm 2\text{sec.}$ immerse body into solder $1/16'' \pm 1/32''$	MIL-STD-750D METHOD-2031
2. Solderability	at $245 \pm 5^\circ\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R = 80\%$ rate at $T_J = 150^\circ\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A = 25^\circ\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^\circ\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIG}$ at $T_A = 121^\circ\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^\circ\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	8.3ms single half sine-wave , one surge.	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A = 85^\circ\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031