

MBR3060FCTW

List

List.....1

Package outline.....2

Features.....2

Mechanical data.....2

Maximum ratings.....2

Electrical characteristics2

Rating and characteristic curves.....3

Pinning information.....4

Marking.....4

Tube packing.....4

Suggested thermal profiles for soldering processes.....5

MBR3060FCTW

30A 60V Power Schottky Barrier Rectifier


Features

- Ultra low V_F .
- High efficiently operation.
- Low power loss.
- Low stored charge majority carrier conduction.
- High forward surge capability.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen-free parts, ex. MBR3060FCTW-H.

Mechanical data

- Case : Molded plastic, ITO-220AB.
- Leads : Solder able per MIL-STD-202, Method 208 .
- Terminals : Puretin plated.
- Polarity : Polarity symbol marking on body.

Package outline

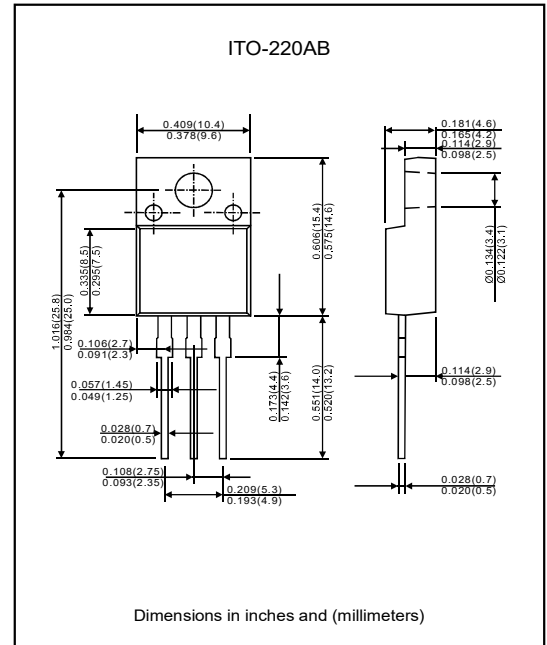

Maximum ratings (At $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC blocking voltage	V_{DC}	60	V
Maximum average forward rectified per device	$I_{(AV)}$	30	A
Maximum average forward rectified per diode		15	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	280	A
Typical thermal resistance per diode (Note 1)	$R_{\theta JC}$	4.5	$^\circ\text{C/W}$
Operating junction temperature	T_J	+150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$





Electrical characteristics (At $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Breakdown voltage per diode	V_{BR}	$I_R=0.3\text{mA}$	60			V
Instantaneous forward voltage per diode	V_F	$I_F=15\text{A}$ ($T_J=25^\circ\text{C}$)		0.65	0.68	V
		$I_F=15\text{A}$ ($T_J=125^\circ\text{C}$)			0.64	
Reverse current per diode	I_R	$V_R=60\text{V}$ ($T_J=25^\circ\text{C}$)			100	μA
		$V_R=60\text{V}$ ($T_J=125^\circ\text{C}$)			50	mA

Note : 1. Thermal resistance from junction to case.



MBR3060FCTW

Rating and characteristic curves

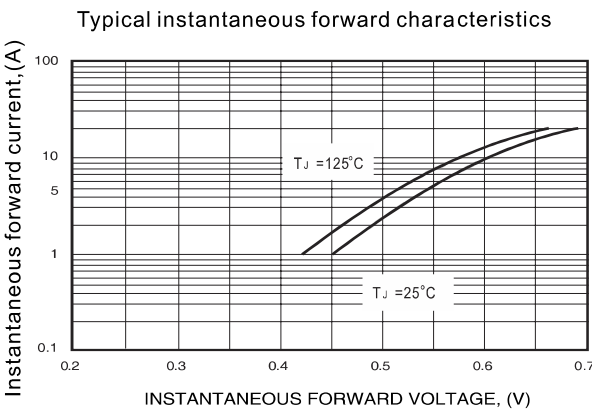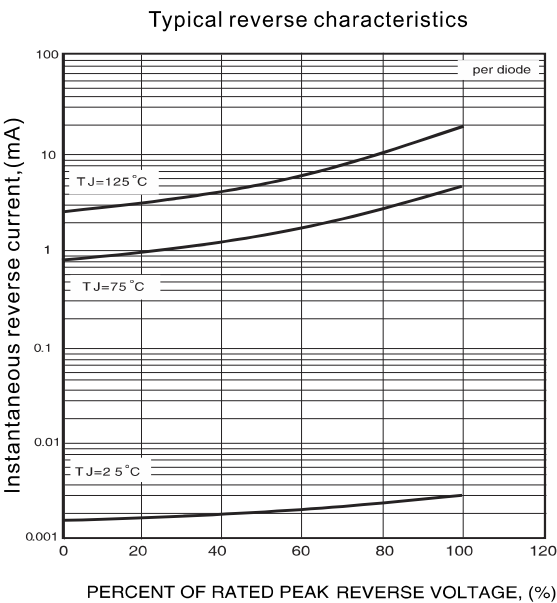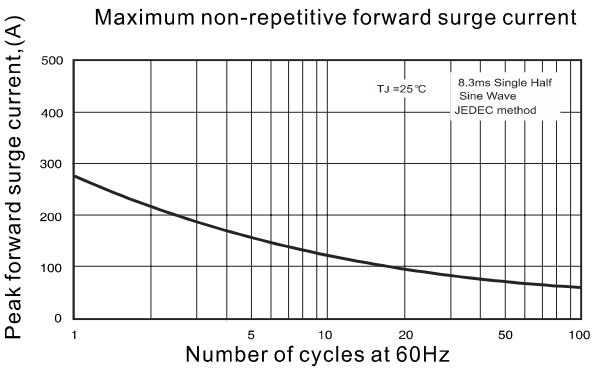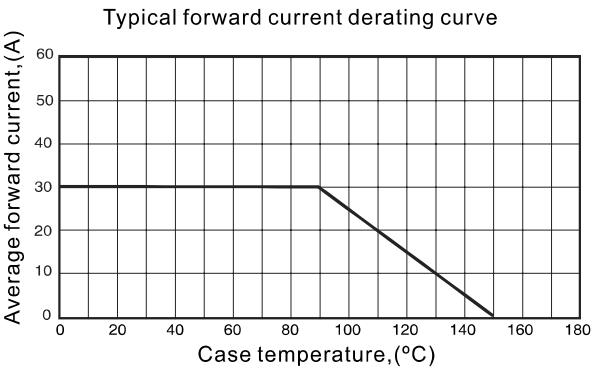

MBR3060FCTW

Pinning information

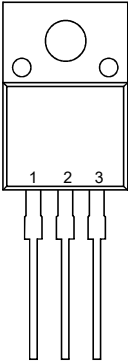Pin	Simplified outline	Symbol
Pin1 Anode Pin2 Cathode Pin3 Anode		

Marking

Type number	Marking code
MBR3060FCTW	MBR3060FCTW

Tube packing

PACKAGE	TUBE (pcs)	BOX (pcs)	INNER BOX (m/m)	CARTON SIZE (m/m)	CARTON (pcs)
ITO-220AB	50	2,000	550*167*75	570*345*170	8,000

MBR3060FCTW

Suggested thermal profiles for soldering processes

Lead free temperature profile wave-soldering

