

MBR60L100CTW

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings	2
Electrical characteristics.....	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Tube packing.....	4
Suggested thermal profiles for soldering processes.....	5
High reliability test capabilities.....	6

MBR60L100CTW

60A Power Low VF Schottky Barrier Rectifiers 100V


Features

- High current density schottky.
- 150°C operating junction temperature.
- Offer 30A half wave and 60A full wave rectification.
- Low power loss, high efficiency.
- Low forward voltage drop.
- High current capability.
- High surge capability.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates halogen-free part, ex. MBR60L100CTW-H.

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : JEDEC TO-220AB molded plastic body over passivated chip
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: As marked
- Mounting Position : Any
- Weight : Approximated 1.85 gram

Package outline

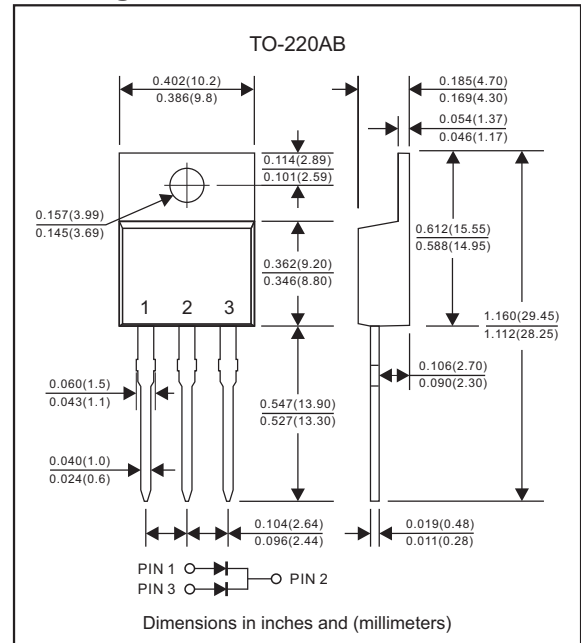

Maximum ratings (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	Symbol	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	100	Volts
RMS voltage	V_{RMS}	70	Volts
DC blocking voltage	V_{DC}	100	Volts
Average forward rectified current per device See Fig.1	I_O	60	A
Peak forward surge current 8.3ms single half sine-wave	I_{FSM}	350	A
Operating junction temperature range	T_J	-55 to +150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	Symbol	Min.	Typ.	Max.	Unit
Instantaneous forward voltage $I_F=30\text{A}$ per leg $T_J=25^\circ\text{C}$ $T_J=125^\circ\text{C}$	V_F		0.75 -	0.78 0.70	Volts
Reverse leakage current at rated V_{DC} per leg $T_J=25^\circ\text{C}$ $T_J=125^\circ\text{C}$	I_R			0.2 50	mA

Thermal characteristics

PARAMETER	Symbol	Value	Unit
Typical thermal resistance junction to case per leg	$R_{\theta JC}$	2.0	$^\circ\text{C/W}$

Rating and characteristic curves (MBR60L100CTW)

Fig.1 FORWARD CURRENT DERATING CURVE

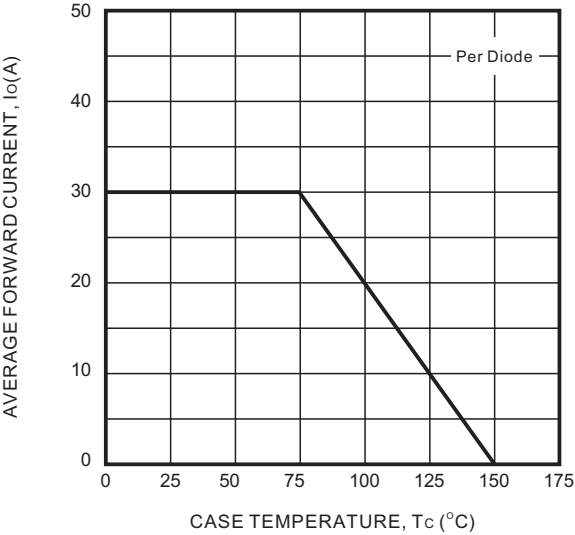


Fig.2 TYPICAL FORWARD CHARACTERISTICS

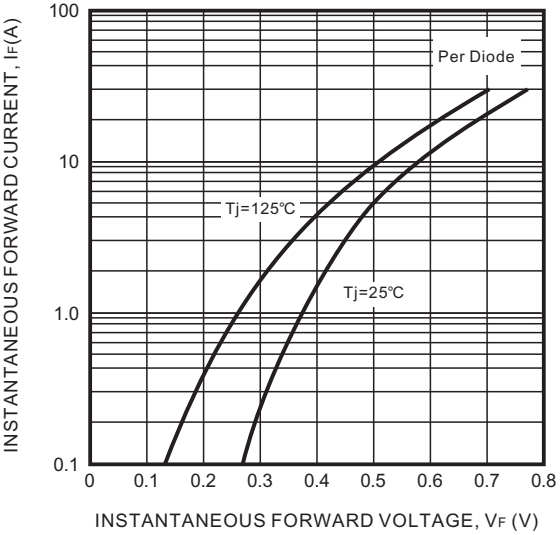


Fig.3 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT




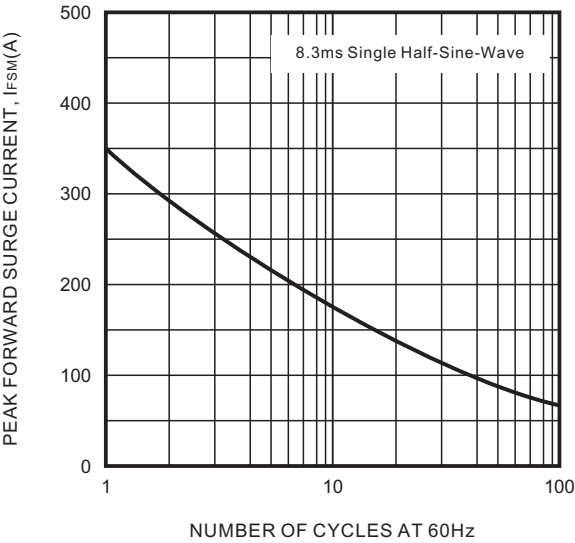


Fig.4 TYPICAL REVERSE CHARACTERISTICS

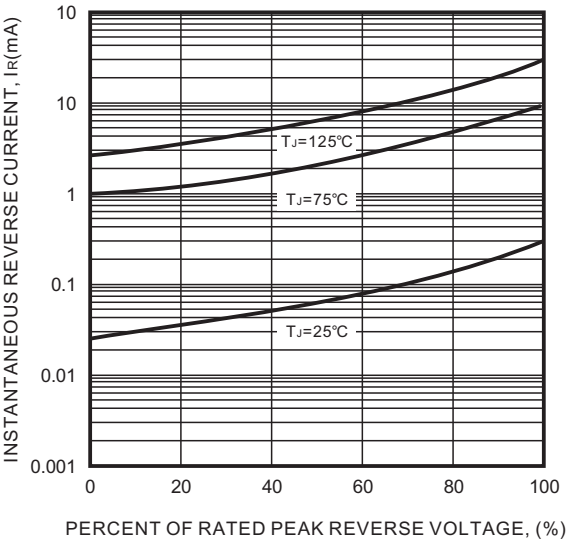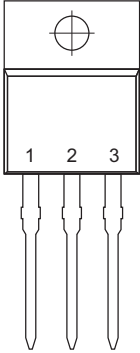

MBR60L100CTW

Pinning information

Pin	Simplified outline	Symbol
Pin1 anode Pin2 cathode Pin3 anode		

Marking

Type number	Marking code
MBR60L100CTW	MBR60L100CTW


Tube packing

PACKAGE	TUBE (pcs)	TUBE SIZE (m/m)	BOX (pcs)	INNER BOX (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
TO-220AB	50	525*31.9*6.4	1,000	545*150*45	575*245*170	5,000	15.0

MBR60L100CTW

Suggested thermal profiles for soldering processes

1. Lead free temperature profile wave-soldering

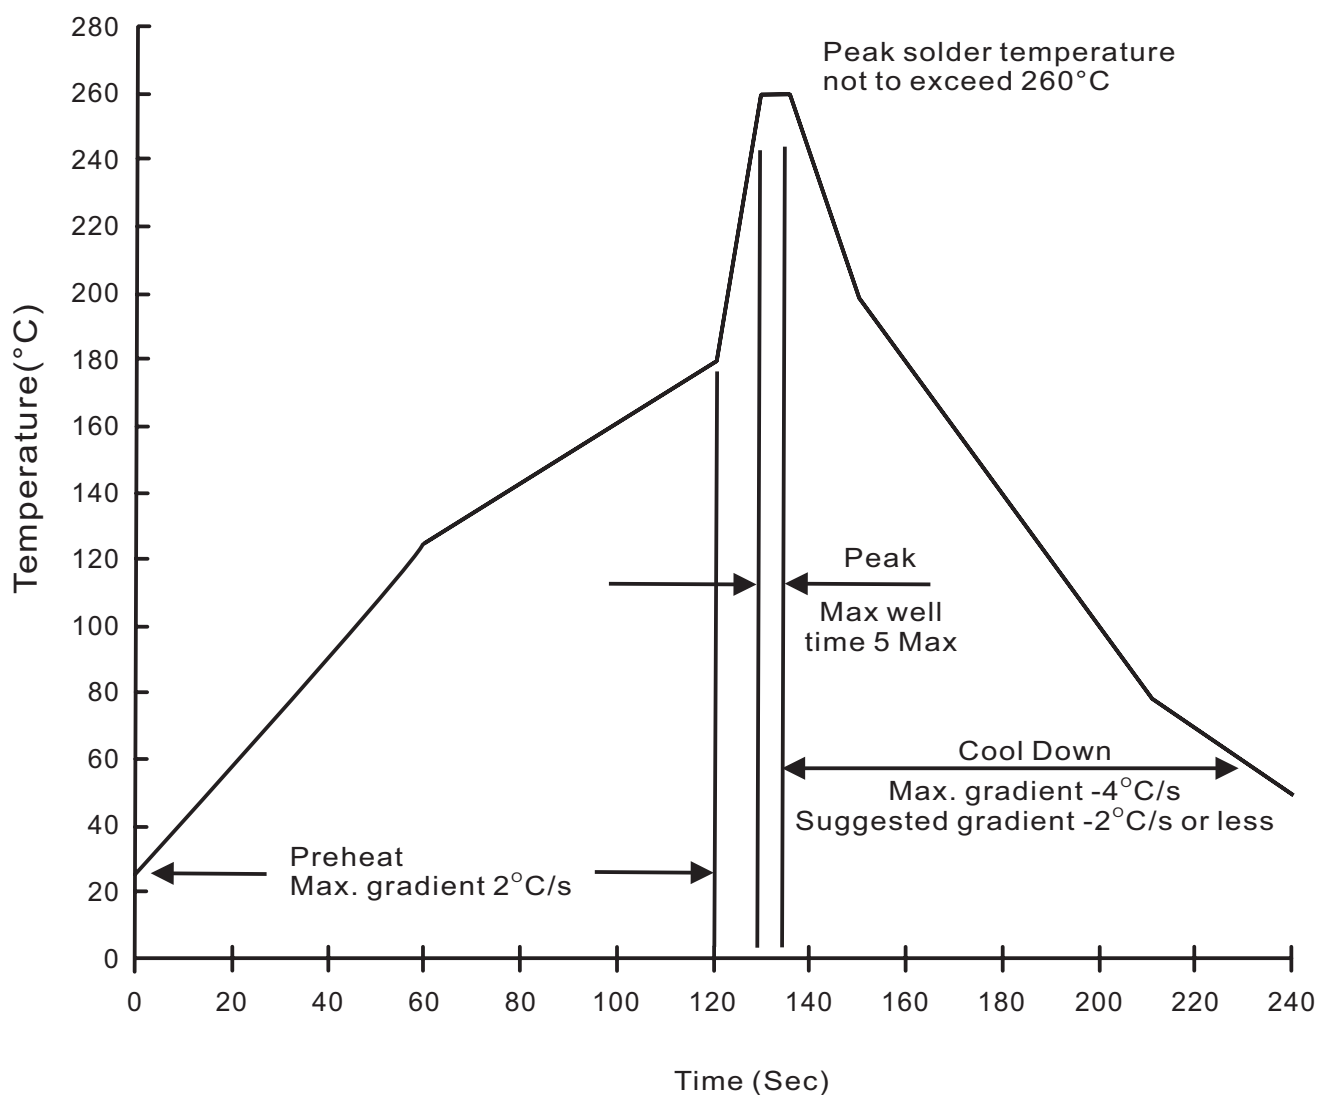

MBR60L100CTW

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260\pm5^{\circ}\text{C}$ for $10\pm2\text{sec.}$ immerse body into solder $1/16''\pm1/32''$	MIL-STD-750D METHOD-2031
2. Solderability	at $245\pm5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^{\circ}\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^{\circ}\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIG}$ at $T_A=121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	8.3ms single half sine-wave , one surge.	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A=85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 150°C for 1000 hrs.	MIL-STD-750D METHOD-1031