

BAS16

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings	2~3
Rating and characteristic curves.....	4
Pinning information.....	5
Marking.....	5
Suggested solder pad layout.....	5
Packing information.....	6
Reel packing.....	7
Suggested thermal profiles for soldering processes.....	7
High reliability test capabilities.....	8

BAS16

225mW Surface Mount Switching Diode- 75V


Features

- Fast speed switching.
- For general purpose switching application.
- High conductance.
- Silicon epitaxial planar chip
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen-free part, ex.BAS16-H.

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-23
- Terminals : Solder plated, solderable per
MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.008 gram

Package outline

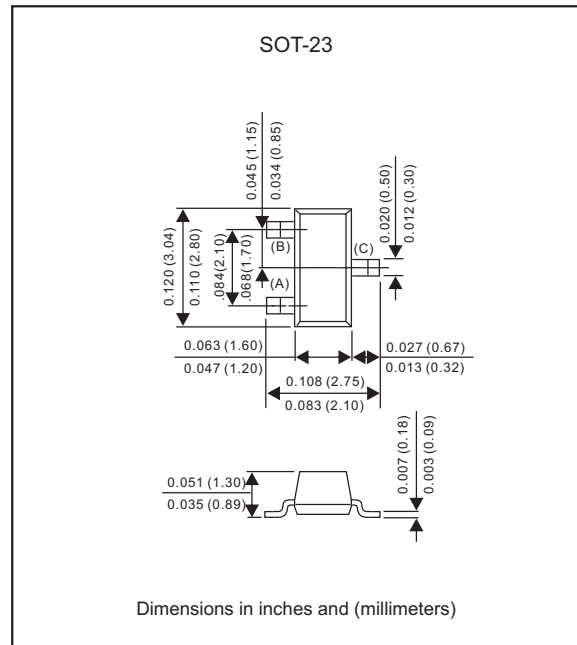

Maximum ratings (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	BAS16	UNIT
Reverse Voltage	V_R	75	V
Forward Current	I_F	200	mA
Peak Forward Surge Current	I_{FM}	500	mA
Non-Repetitive Peak Forward Surge Current @ $t=1.0\mu\text{s}$ @ $t=1.0\text{s}$	I_{FSM}	2.0 1.0	A

Thermal Characteristics

PARAMETER	SYMBOL	MAX.	UNIT
Total Device Dissipation FR-5 Board* ¹ , $T_A = 25^{\circ}\text{C}$ Derate Above 25°C	P_D	225 1.8	mW mW/ $^{\circ}\text{C}$
Thermal Resistance Junction to Ambient	R_{BJA}	556	$^{\circ}\text{C}/\text{W}$
Total Device Dissipation Alumina Substrate* ² , $T_A = 25^{\circ}\text{C}$ Derate Above 25°C	P_D	300 2.4	mW mW/ $^{\circ}\text{C}$
Thermal Resistance Junction to Ambient	R_{BJA}	417	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

1. FR-5 = 1.0 x 0.75 x 0.062 in.


2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

BAS16

Electrical Characteristics (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Reverse Breakdown Voltage($I_{BR}=100\mu\text{A}$)	V_{BR}	75		V
Reverse Voltage Leakage Current (at $V_R = 75\text{V}$, $T_J = 25^{\circ}\text{C}$) (at $V_R = 25\text{V}$, $T_J = 150^{\circ}\text{C}$) (at $V_R = 75\text{V}$, $T_J = 150^{\circ}\text{C}$)	I_R		1.0 30 50	μA
Diode Capacitance($V_R = 0\text{V}$, $f = 1.0\text{MHz}$)	C_D		2.0	pF
Reverse Recovery Time($I_F = I_R = 10\text{mA}$, $V_R = 5.0\text{Vdc}$, $I_R(\text{REC}) = 1.0\text{mA}$, $R_L = 100_{\Omega}$)	t_{rr}		6.0	ns
Forward Voltage (at $I_F = 1.0\text{mA}$) (at $I_F = 10\text{mA}$) (at $I_F = 50\text{mA}$) (at $I_F = 150\text{mA}$)	V_F		715 855 1000 1250	mV

Recovery Time Equivalent Test Circuit

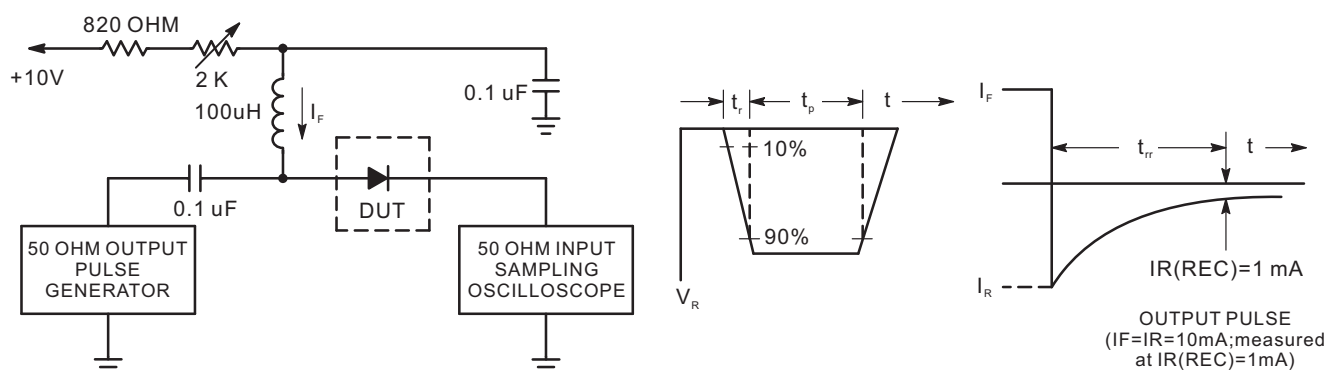

- Notes : 1. A2.0 Kohm variable resistor adjusted for a forward Current (I_F) of 10mA.
 2. Input pulse is adjusted so $I_R(\text{peak})$ is equal to 10 mA.
 3. $t_p \gg t_{rr}$.

Rating and characteristic curves(BAS16)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

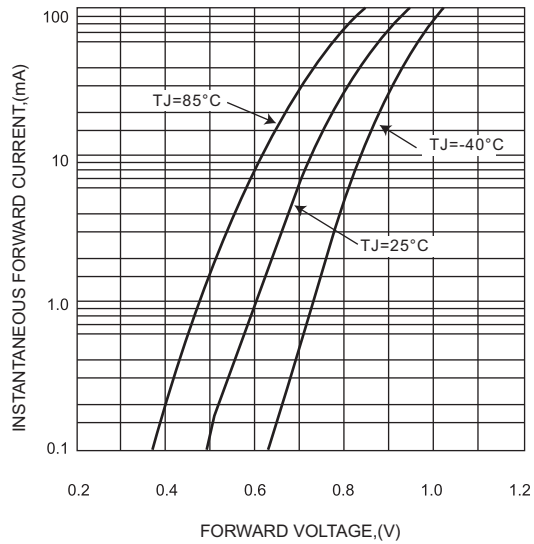


FIG.3 - TYPICAL REVERSE CHARACTERISTICS




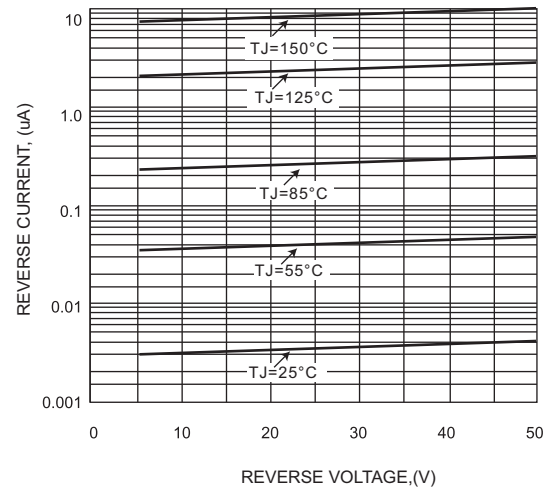


FIG.2 - TYPICAL DIODE CAPACITANCE

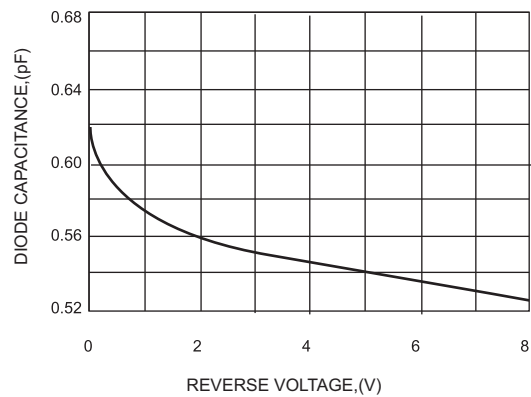


BAS16

Pinning information

Type number	Marking code	Simplified outline	Symbol
BAS16	A6		

Suggested solder pad layout


SOT-23

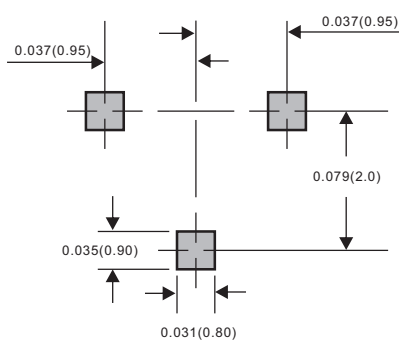

Dimensions in inches and (millimeters)

BAS16

Packing information

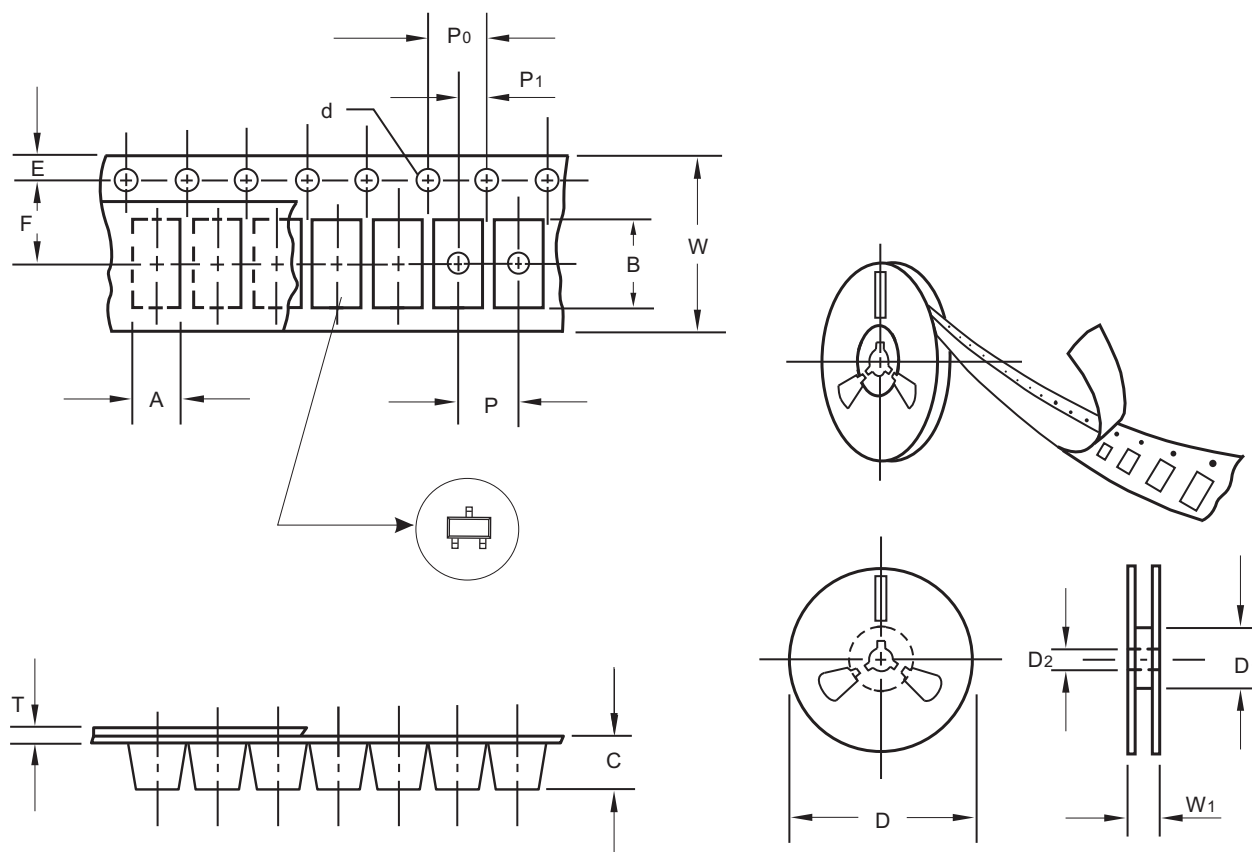

unit:mm

Item	Symbol	Tolerance	SOT-23
Carrier width	A	0.1	3.15
Carrier length	B	0.1	2.77
Carrier depth	C	0.1	1.22
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	11.40

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


BAS16

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOT-23	7"	3,000	4.0	30,000	183*183*123	178	382*262*387	240,000	11.6

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

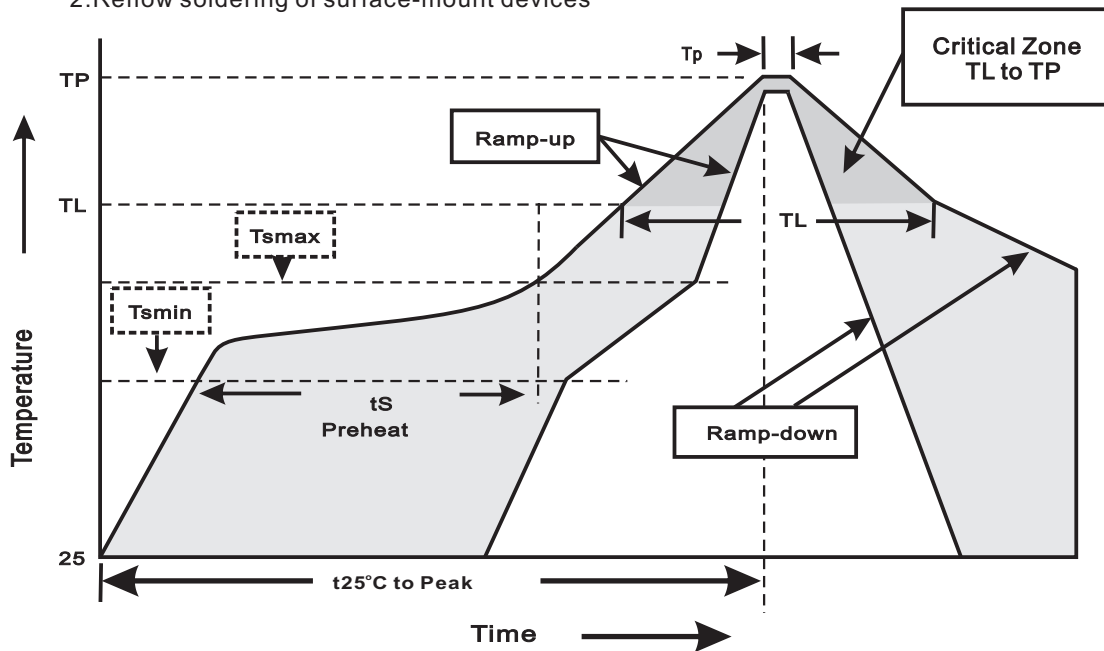

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T_L to T_P)	$<3^\circ\text{C/sec}$
Preheat -Temperature Min(T_{smin}) -Temperature Max(T_{smax}) -Time(min to max)(t_s)	150°C 200°C 60~120sec
T_{smax} to T_L -Ramp-upRate	$<3^\circ\text{C/sec}$
Time maintained above: -Temperature(T_L) -Time(t_L)	217°C 60~260sec
Peak Temperature(T_P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t_P)	10~30sec
Ramp-down Rate	$<6^\circ\text{C/sec}$
Time 25°C to Peak Temperature	$<6\text{minutes}$

BAS16

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260\pm 5^{\circ}\text{C}$ for $10\pm 2\text{sec.}$ immerse body into solder $1/16''\pm 1/32''$	MIL-STD-750D METHOD-2031
2. Solderability	at $245\pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^{\circ}\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^{\circ}\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIG}$ at $T_A=121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	Peak forward surge current	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A=85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031