

SGFM101YW-D Thru SGFM108YW-D

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings and electrical characteristics	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Suggested solder pad layout.....	4
Packing information.....	5
Reel packing.....	6
Suggested thermal profiles for soldering processes.....	6
High reliability test capabilities.....	7

SGFM101YW-D Thru SGFM108YW-D

10.0A Surface Mount Super Fast Recovery Rectifiers : 50-600V


Features

- Construction utilizes void-free molded plastic technique.
- Low reverse leakage.
- High forward surge current capability.
- High temperature soldering guaranteed 260°C/10 seconds at terminals.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen free parts, ex. SGFM101YW-D-H.

Mechanical data

- Epoxy:UL94-V0 rated flame retardant.
- Case : Molded plastic, DPAK-1 (TO-252).
- Terminals : Solder plated, solder able per MIL-STD-750, Method 2026.
- Polarity : Indicated by cathode band.
- Mounting Position : Any.

Package outline

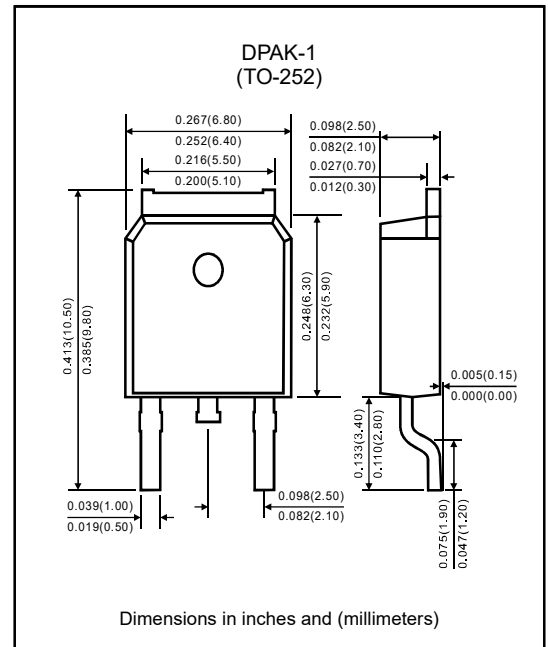

Maximum ratings and electrical characteristics (At $T_A=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	SGFM 101YW-D	SGFM 102YW-D	SGFM 104YW-D	SGFM 106YW-D	SGFM 107YW-D	SGFM 108YW-D	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	500	600	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	350	420	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	500	600	V
Maximum average forward rectified current at T _c =110°C	I _(AV)	10						A
Peak forward surge current,8.3ms single half sine-wave superimposed on rated load	I _{FSM}	150						A
Maximum instantaneous forward voltage at 10.0A	V _F	1			1.3	1.7		V
Maximum DC reverse current at rated DC blocking voltage (T _A =25°C) (T _A =125°C)	I _R	5						μA
		200						
Maximum reverse recovery time	t _{rr}	35						ns
Typical thermal resistance	R _{θJC}	2.5						°C/W
Operating junction temperature range	T _J	-55 to +150						°C
Storage temperature range	T _{STG}	-55 to +150						°C

Note: 1. Reverse recovery time test condition: $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

SGFM101YW-D Thru SGFM108YW-D



Rating and characteristic curves

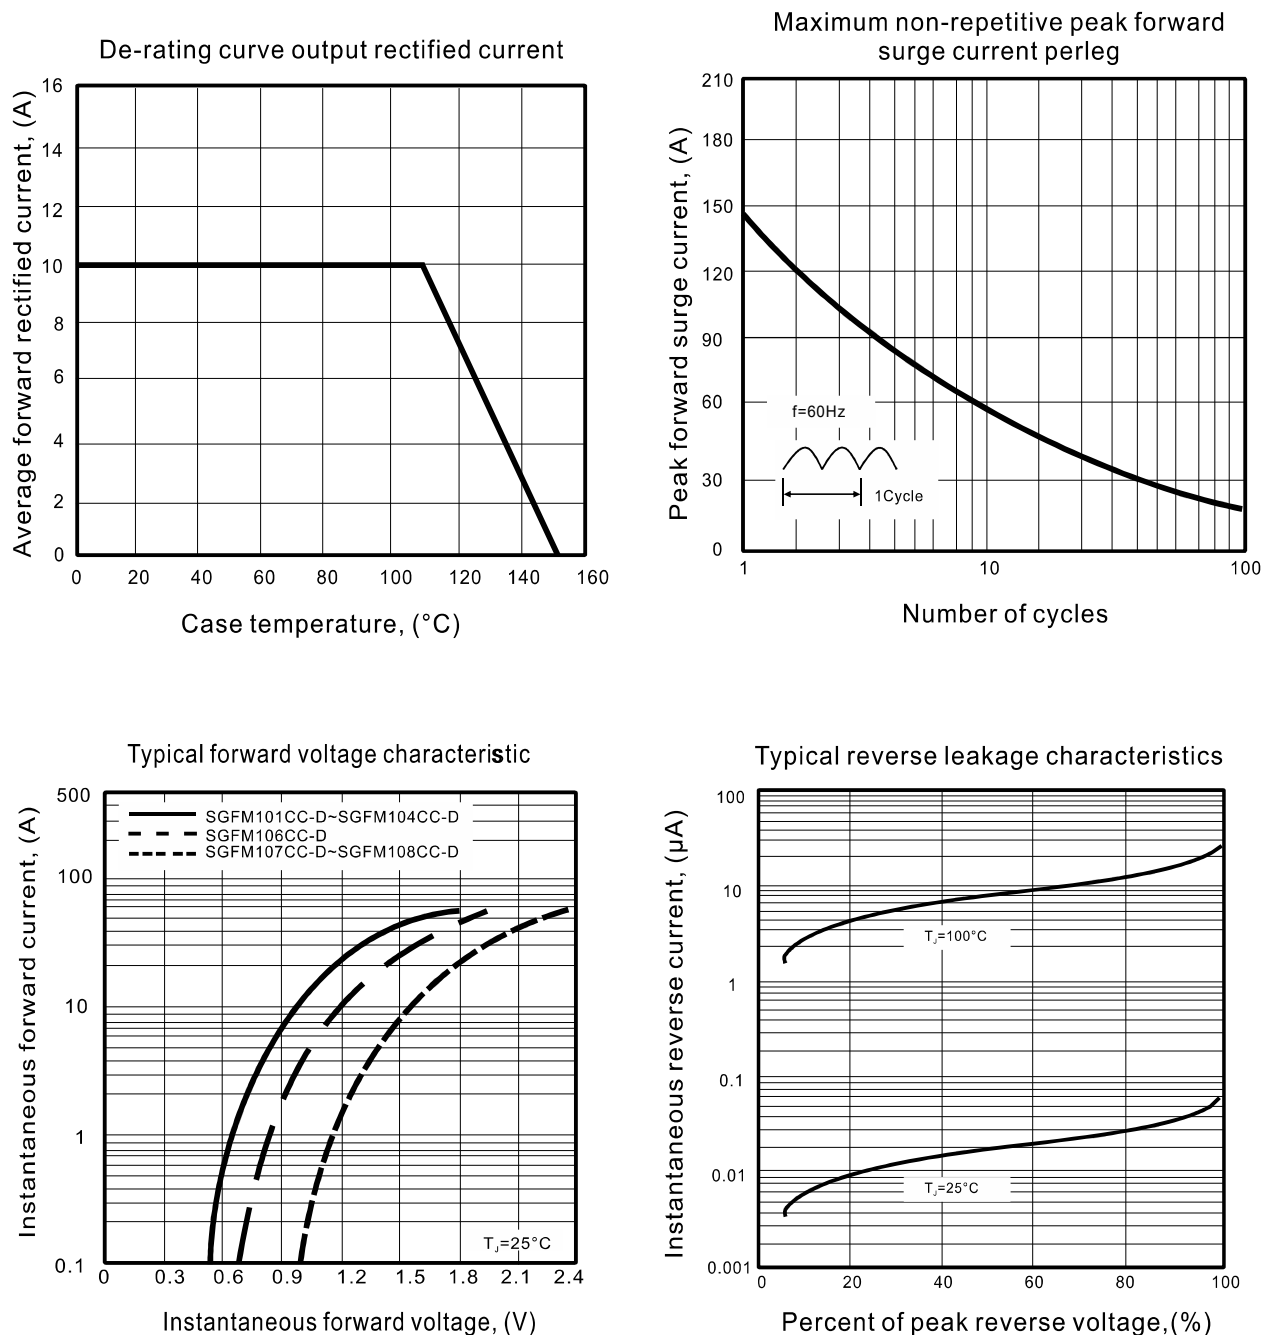

Formosa MS

SGFM101YW-D Thru SGFM108YW-D


Pinning information

Pin	Simplified outline	Symbol
Pin1, 3 Anode Pin2, 4 Cathode		

Marking

Type number	Marking code
SGFM101YW-D	SF1005YS
SGFM102YW-D	SF1010YS
SGFM104YW-D	SF1020YS
SGFM106YW-D	SF1040YS
SGFM107YW-D	SF1050YS
SGFM108YW-D	SF1060YS

Suggested solder pad layout

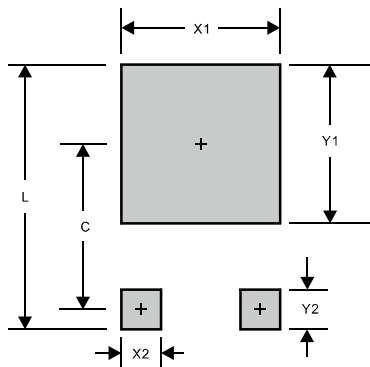


PACKAGE	DPAK-1
C	0.261(6.64)
L	0.457(11.60)
X1	0.240(6.10)
X2	0.056(1.42)
Y1	0.298(7.57)
Y2	0.109(2.76)

Dimensions in inches and (millimeters)

SGFM101YW-D Thru SGFM108YW-D

Packing information

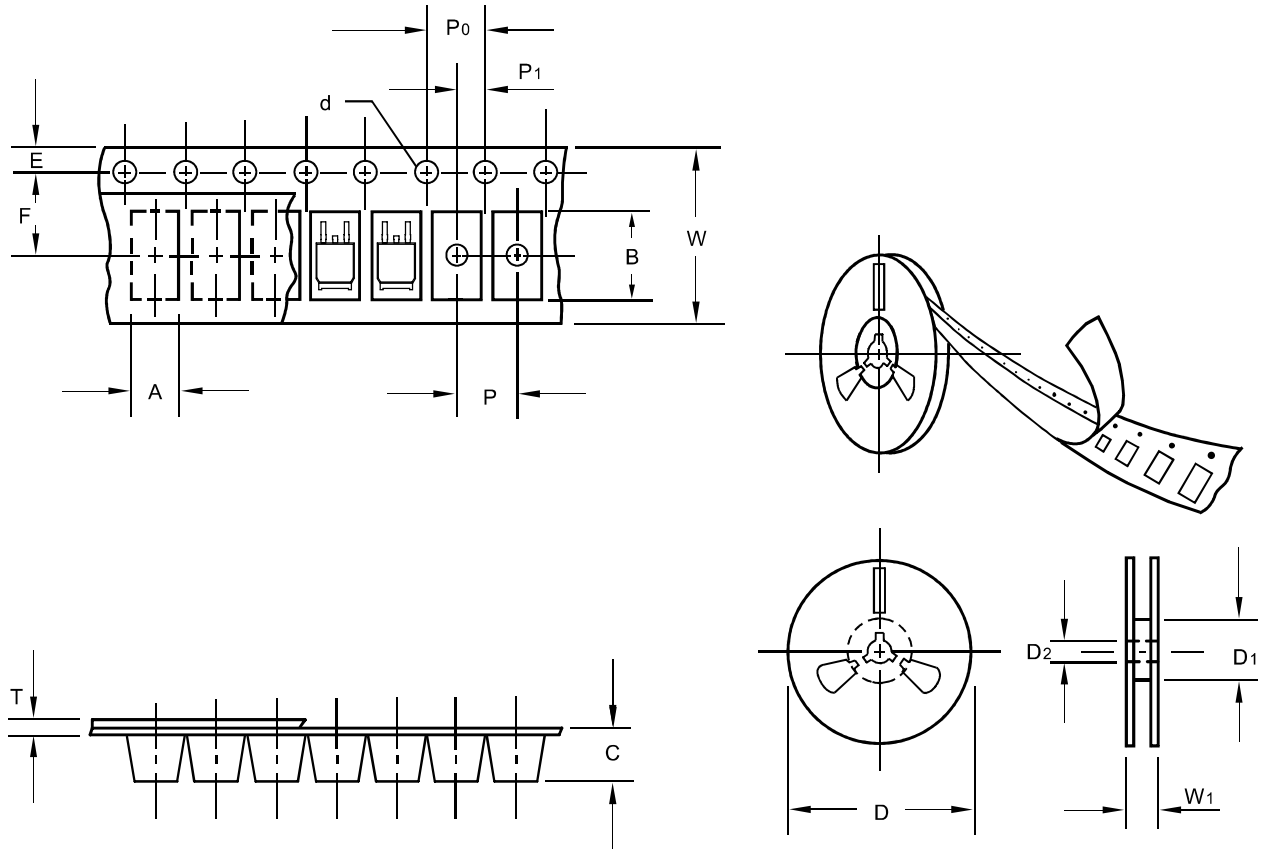

unit:mm

Item	Symbol	Tolerance	DK-1 (TO-252)
Carrier width	A	0.1	6.90
Carrier length	B	0.1	10.50
Carrier depth	C	0.1	2.70
Sprocket hole	d	0.1	1.55
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	50.00
7" Reel outside diameter	D	2.0	-
7" Reel inner diameter	D1	min	-
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	7.50
Punch hole pitch	P	0.1	8.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.30
Tape width	W	0.3	16.00
Reel width	W1	1.0	22.00

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


SGFM101YW-D Thru SGFM108YW-D

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)
DPAK-1/ TO-252	13"	2,500	8.0	5,000	335*335*38	330	350*350*225	25,000

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

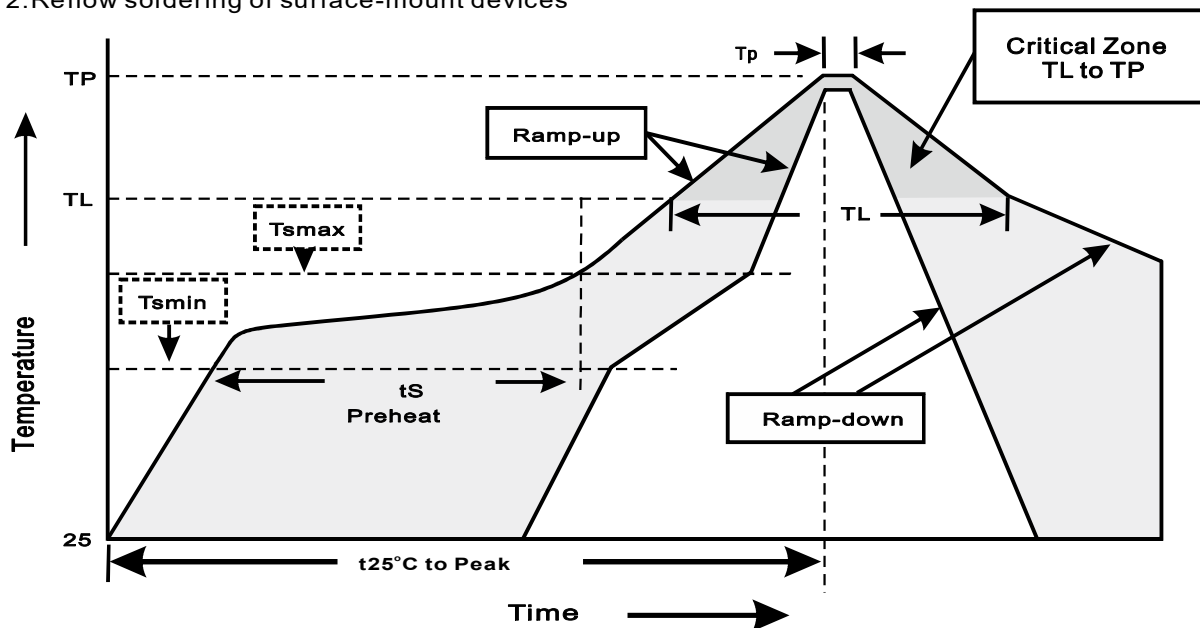

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T_L to T_P)	$<3^{\circ}\text{C}/\text{sec}$
Preheat -Temperature Min($T_{\text{smín}}$) -Temperature Max($T_{\text{smáx}}$) -Time(min to max)(t_s)	150°C 200°C 60~120sec
$T_{\text{smáx}}$ to T_L -Ramp-upRate	$<3^{\circ}\text{C}/\text{sec}$
Time maintained above: -Temperature(T_L) -Time(t_L)	217°C 60~260sec
Peak Temperature(T_P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t_P)	10~30sec
Ramp-down Rate	$<6^{\circ}\text{C}/\text{sec}$
Time 25°C to Peak Temperature	$<6\text{minutes}$

Formosa MS

SGFM101YW-D Thru SGFM108YW-D

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at 260±5°C for 10±2sec. immerse body into solder 1/16"±1/32"	MIL-STD-750D METHOD-2031
2. Solderability	at 245±5°C for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R=80\%$ rate at $T_J=125^\circ\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A=25^\circ\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^\circ\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	15P _{SIG} at $T_A=121^\circ\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to +125°C dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	8.3ms single half sine-wave , one surge.	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A=85^\circ\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 150°C for 1000 hrs.	MIL-STD-750D METHOD-1031