

1N4148WS

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings and Electrical characteristics	2
Rating and characteristic curves.....	3
Pinning information.....	4
Marking.....	4
Suggested solder pad layout.....	4
Packing information.....	5
Reel packing.....	6
Suggested thermal profiles for soldering processes.....	6
High reliability test capabilities.....	7

1N4148WS

150mA Surface Mount Switching Diode 75V


Features

- Fast switching speed
- Electrically identical to standard JEDEC
- Surface mount package ideally suited for automatic insertion
- Tiny plastic SMD package
- High conductance
- Silicon epitaxial planar chip
- Lead-free parts meet RoHS requirements
- Suffix "-H" indicates Halogen free part, ex. 1N4148WS-H

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323F
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any
- Weight : Approximated 0.005 gram

Package Outline

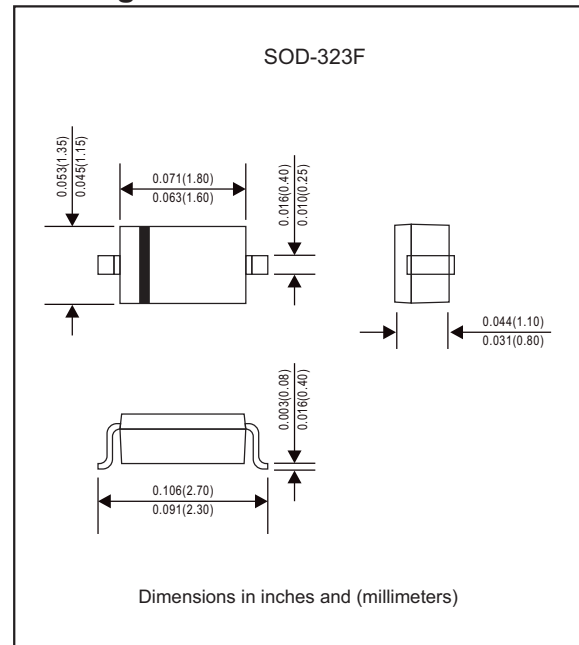

Maximum ratings (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	1N4148WS	Unit
Maximum reverse voltage	V_R	75	V
Maximum peak reverse voltage	V_{RM}	100	V
Maximum RMS voltage	V_{RMS}	50	V
Maximum DC blocking voltage	V_{DC}	75	V
Maximum average forward current at $T_A = 25^{\circ}\text{C}$	I_O	150	mA
Maximum peak forward surge current, 1.0 μs	I_{FSM}	2.0	A
Maximum power dissipation derate above 25°C	P_D	200	mW
Typical thermal resistance junction to ambient	$R_{\theta JA}$	625	$^{\circ}\text{C/W}$
Operating junction temperature range	T_J	-55 to +150	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}\text{C}$

Electrical characteristics (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	1N4148WS	Unit
Maximum forward voltage at $I_F=1.0\text{mA}$ $I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=150\text{mA}$	V_F	0.715 0.855 1.0 1.25	V
Maximum reverse leakage current at $V_R=20\text{V}$ $V_R=75\text{V}$	I_R	0.025 1.0	μA
Maximum junction capacitance (Note 1)	C_J	2.0	pF
Maximum reverse recovery time (Note 2)	t_{rr}	4.0	ns

Notes 1: C_J at $V_R = 0\text{V}$, $f = 1\text{MHz}$

2: From $I_F = 10\text{mA}$ to $I_R = 1\text{mA}$, $V_R = 6\text{V}$, $R_L = 100\Omega$

Rating and characteristic curves (1N4148WS)

Fig. 1 TYPICAL FORWARD CHARACTERISTICS

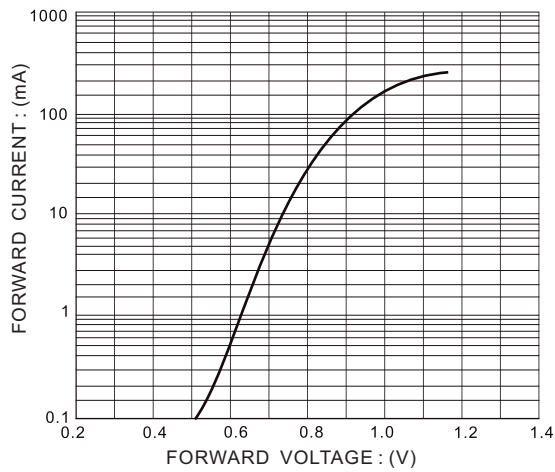


Fig. 2 TYPICAL REVERSE CHARACTERISTICS


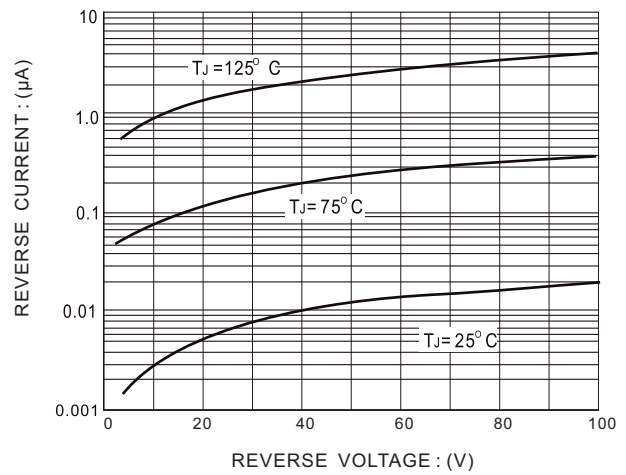


Fig. 3 POWER DERATING CURVE

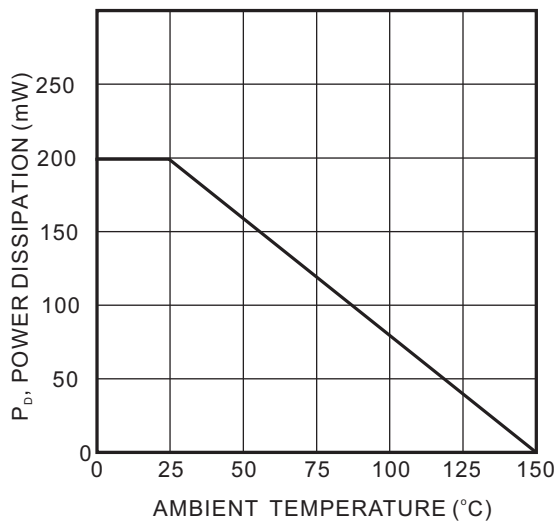

1N4148WS


Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
1N4148WS	5D, T6, T4

Suggested solder pad layout

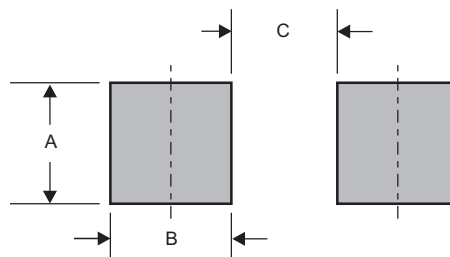


Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-323F	0.033 (0.83)	0.025 (0.63)	0.063 (1.60)

1N4148WS

Packing information

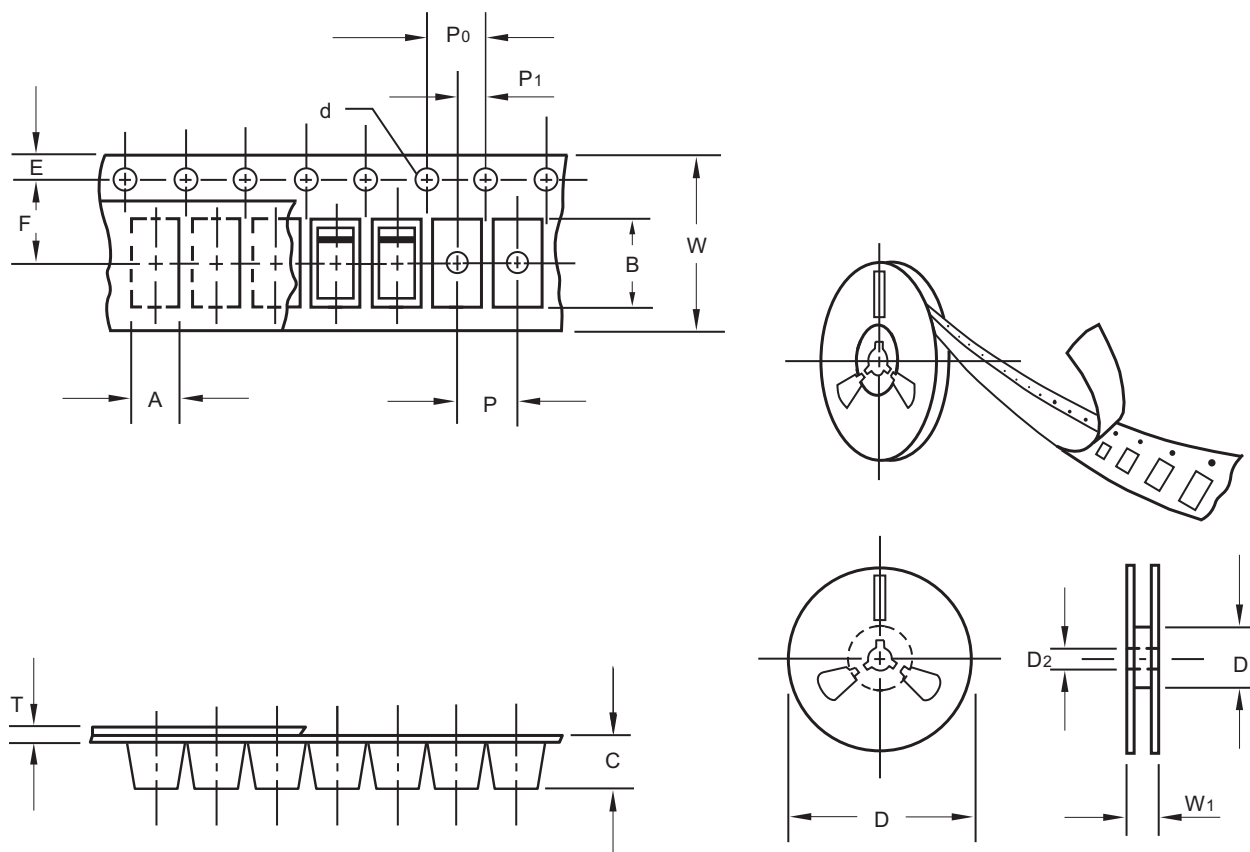

unit:mm

Item	Symbol	Tolerance	SOD-323F
Carrier width	A	0.1	1.46
Carrier length	B	0.1	2.95
Carrier depth	C	0.1	1.25
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	11.40

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


1N4148WS

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-323F	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	8.0

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

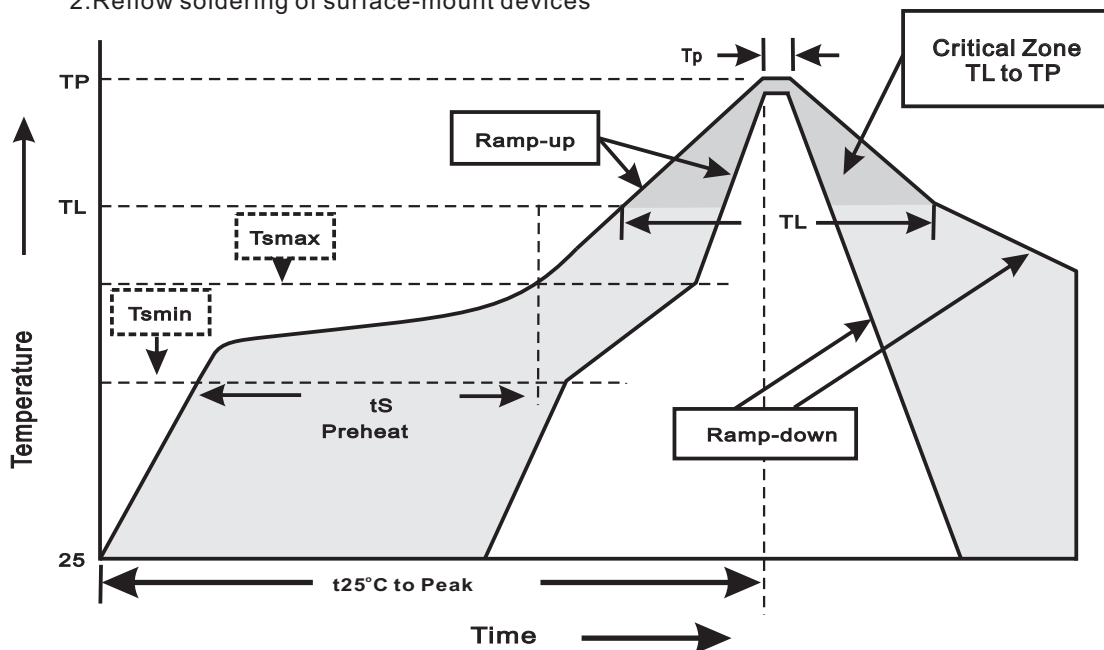

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T_L to T_P)	$<3^{\circ}\text{C}/\text{sec}$
Preheat -Temperature Min(T_{smin}) -Temperature Max(T_{smax}) -Time(min to max)(t_s)	150°C 200°C 60~120sec
T_{smax} to T_L -Ramp-upRate	$<3^{\circ}\text{C}/\text{sec}$
Time maintained above: -Temperature(T_L) -Time(t_L)	217°C 60~260sec
Peak Temperature(T_P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t_P)	10~30sec
Ramp-down Rate	$<6^{\circ}\text{C}/\text{sec}$
Time 25°C to Peak Temperature	$<6\text{minutes}$

1N4148WS

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260 \pm 5^{\circ}\text{C}$ for 10 sec.	MIL-STD-750D METHOD-2031
2. Solderability	at $245 \pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_R = 80\%$ rate at $T_J = 150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Forward Operation Life	Rated average rectifier current at $T_A = 25^{\circ}\text{C}$ for 500hrs.	MIL-STD-750D METHOD-1027
5. Intermittent Operation Life	$T_A = 25^{\circ}\text{C}$, $I_F = I_O$ On state: power on for 5 min. off state: power off for 5 min. on and off for 500 cycles.	MIL-STD-750D METHOD-1036
6. Pressure Cooker	$15P_{SIG}$ at $T_A = 121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
7. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
8. Forward Surge	Peak forward surge current, 1.0 μs	MIL-STD-750D METHOD-4066-2
9. Humidity	at $T_A = 85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
10. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031